

EMC Test Report



**Add value.
Inspire trust.**

Applicant: Shenzhen Roborock Innovation Technology Co., Ltd.

Product: Cordless Stick Vacuum Cleaner

Model: H9A2A, H9A3A

In accordance with, EN 55014-1, EN 61000-3-2,
EN 61000-3-3 and EN 55014-2

Prepared for: Shenzhen Roborock Innovation Technology Co., Ltd.
Room 1802, Building D1, Nanshan Zhiyuan, No.1001 Xueyuan Avenue,
Changyuan community, Taoyuan Street, Nanshan District, Shenzhen, P.R.
China

COMMERCIAL-IN-CONFIDENCE

Report Number: 4840125265300

RESPONSIBLE FOR	NAME	SIGNATURE	DATE
Approved By	Bo Dai		2025.06.09
Prepared By	Zhilan Xue		2025.06.09

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service control rules.

EXECUTIVE SUMMARY

Two samples of this product were tested and found to be compliant with EN IEC 55014-1:2021, EN IEC 55014-2:2021, EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A1:2019/A2:2021.

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The reports apply only to the specific samples tested under stated test conditions. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service.

TÜV SÜD Certification and Testing
(China) Co., Ltd.

Floor 1-4, Building B, No.37, Tuanjie
Road(Middle), Xishan Economic and
Technological Development Zone,
Wuxi, Jiangsu. China

Phone: +86 510 8820 3737
Fax: +86 510 8820 3636

ID Number: EMC_WUX_F_25.43E
Revision:04
Effective:2023-07-11

Contents

1	Report Summary	3
1.1	Report Modification Record	3
1.2	Introduction	3
1.3	Brief Summary of Results	4
1.4	Product Information	5
1.5	Deviations from the Standard	6
1.6	Test Location	7
2	Test Details.....	8
2.1	Conducted Disturbance at Mains Terminals.....	8
2.2	Disturbance power	15
2.3	Radiated Disturbance.....	20
2.4	Harmonic current emission.....	29
2.5	Flicker	36
2.6	Electrostatic discharge immunity test.....	41
2.7	Radiated, radio-frequency, electromagnetic field immunity test.....	44
2.8	Electrical fast transient /burst immunity test	47
2.9	Surge immunity test	50
2.10	Immunity to conducted disturbances, induced by radio-frequency fields.....	53
2.11	Voltage dips, short interruptions and voltage variations immunity tests	56
3	Test Equipment Information	59
3.1	General Test Equipment Used	59
4	Measurement Uncertainty.....	61
5	Photographs.....	62

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2025.06.09

1.2 Introduction

The information contained in this report is intended to show verification of the EMC Qualification Approval Testing of the requirements of the standards for the tests listed in Section 1.3.

Applicant address	Shenzhen Roborock Innovation Technology Co., Ltd. Room 1802, Building D1, Nanshan Zhiyuan, No.1001 Xueyuan Avenue, Changyuan community, Taoyuan Street, Nanshan District, Shenzhen, P.R. China
Manufacturer address	Shenzhen Roborock Innovation Technology Co., Ltd. Room 1802, Building D1, Nanshan Zhiyuan, No.1001 Xueyuan Avenue, Changyuan community, Taoyuan Street, Nanshan District, Shenzhen, P.R. China
Model Number(s)	For Cordless Stick Vacuum Cleaner: H9A2A, H9A3A For Auto-Empty Dock: MDS23HRR, MDS24HRR
Rated voltage & frequency & current	H9A2A: 28.8 VDC, 16.6 A; H9A3A: 21.6VDC, 15.3A For Auto-Empty Dock: Rated Input (Charging): MDS23HRR:220-240 VAC, 50-60 Hz, 0.3 A; MDS24HRR:220-240 VAC, 50-60 Hz, 0.2A Rated Input (Dust evacuation & charging): MDS23HRR:220-240 VAC, 50-60 Hz, 5 A; MDS24HRR:220-240 VAC, 50-60 Hz, 3A Rated Output: MDS23HRR:34.5 VDC, 1 A; MDS24HRR:26 VDC, 0.8A
Sample Tested	For Cordless Stick Vacuum Cleaner: H9A2A For Auto-Empty Dock: MDS23HRR; For Cordless Stick Vacuum Cleaner: H9A3A For Auto-Empty Dock: MDS24HRR;
Test Specification	EN IEC 55014-1:2021, EN IEC 55014-2:2021, EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A1:2019/A2:2021
Date of Receipt of EUT	2025.04.11
Start of Test	2025.04.12
Finish of Test	2025.05.21
Name of Engineer(s)	Zhilan Xue

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with EN 55014-1, EN 61000-3-2, EN 61000-3-3 and EN 55014-2 is shown below.

Section	Specification	Clause	Test Description	Result	Comments/Base Standard
2.1	EN IEC 55014-1:2021	4.3, 3.6	Conducted Disturbance	Pass	--
2.2	EN IEC 55014-1:2021	4.3, 4.4	Disturbance Power	Pass	--
2.3	EN IEC 55014-1:2021	4.3, 4.5	Radiated Disturbance	Pass	--
2.4	EN IEC 61000-3-2:2019/A1:2021	7	Harmonic current emission	Pass	
2.5	EN 61000-3-3:2013/A1:2019/A2:2021	6	Flicker	Pass	
2.6	EN IEC 55014-2:2021	5.1	Electrostatic discharge immunity test	Pass	IEC 61000-4-2
2.7	EN IEC 55014-2:2021	5.5	Radiated, radio-frequency, electromagnetic field immunity test	Pass	IEC 61000-4-3
2.8	EN IEC 55014-2:2021	5.2	Electrical fast transient /burst immunity test	Pass	IEC 61000-4-4
2.9	EN IEC 55014-2:2021	5.3	Immunity to conducted disturbances, induced by radio-frequency fields	Pass	IEC 61000-4-6
2.10	EN IEC 55014-2:2021	5.6	Surge immunity test	Pass	IEC 61000-4-5
2.11	EN IEC 55014-2:2021	5.7	Voltage dips, short interruptions and voltage variations immunity tests	Pass	IEC 61000-4-11

1.4 Product Information

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Cordless Stick Vacuum Cleaner.

The highest clock frequency in Auto-Empty Dock is less than 15MHz.

The worst status was recorded.

1.4.2 EUT Port/Cable Identification

Port	Max Cable Length specified	Usage	Type	Screened
Power line	--	--	2 core	No

1.4.3 Test Configuration

Configuration	Description
1	230V AC 50Hz
2	Battery powered H9A2A: 28.8 VDC; H9A3A: 21.6 VDC

1.4.4 Modes of Operation

Mode	Description
1	The EUT was dust evacuation & charging
2	The EUT was DC powered, bed brush cleaning
3	The EUT was DC powered, floor brush cleaning

1.4.5 Monitoring of Performance

The EUT works normally, the EUT was monitored by visual inspection.

1.4.6 Performance Criteria

EN 55014-2:

Performance criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however no change of actual operating state or stored data is allowed to persist after test. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instruction for use.

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Test Location

TÜV SÜD Product Service conducted the following tests at TÜV SÜD Certification and Testing (China) Co., Ltd.

Address:

Floor 1-4, Building B, No.37, Tuanjie Road(Middle), Xishan Economic and Technological Development Zone, Wuxi, Jiangsu, P.R.China

Test Name	Name of Engineer(s)
Conducted Disturbance at Mains Terminals	Haoyu Wang
Disturbance power	Haoyu Wang
Radiated Disturbance	Haoyu Wang
Electrostatic discharge immunity test	Haoyu Wang
Radiated, radio-frequency, electromagnetic field immunity test	Haoyu Wang
Electrical fast transient /burst immunity test	Haoyu Wang
Immunity to conducted disturbances, induced by radio-frequency fields	Haoyu Wang
Surge immunity test	Haoyu Wang
Voltage dips, short interruptions and voltage variations immunity tests	Haoyu Wang
Harmonic current emission	Haoyu Wang
Flicker	Haoyu Wang

2 Test Details

2.1 Conducted Disturbance at Mains Terminals

2.1.1 Specification Reference

Refer to 1.3

2.1.2 Equipment Under Test

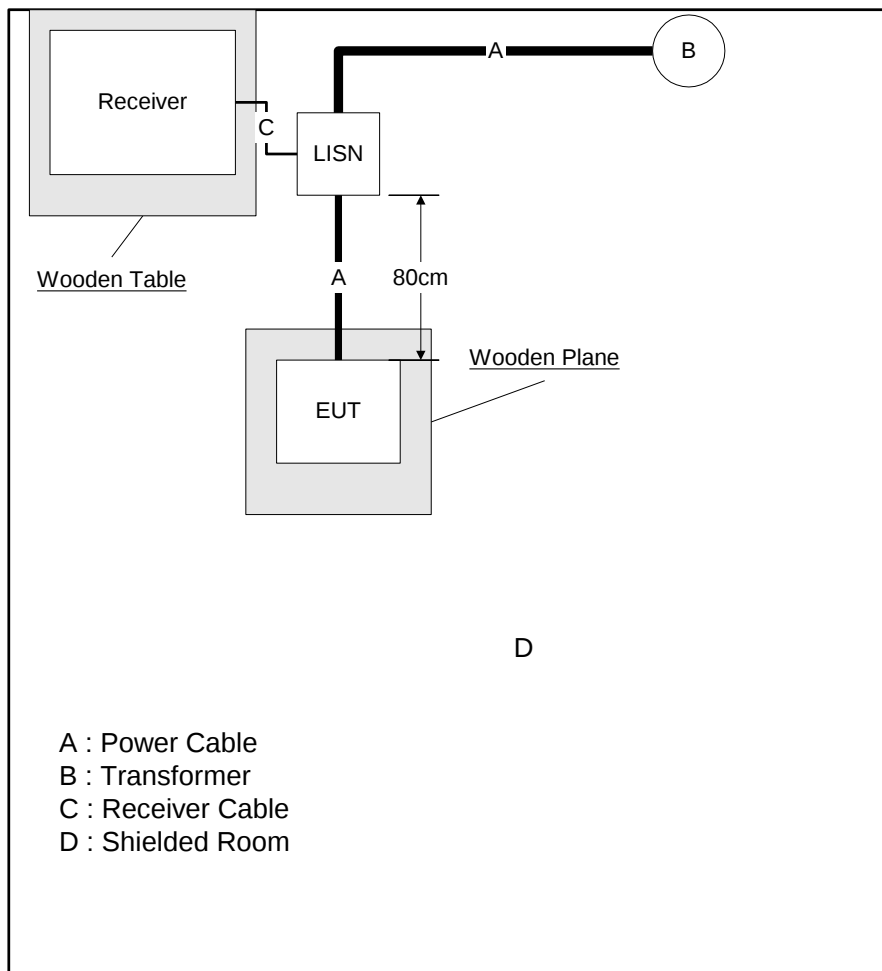
H9A2A, H9A3A

2.1.3 Date of Test

2025.04.28, 2025.05.21

2.1.4 Test Method

The EUT was placed on a non-conductive table 0.1m above a reference ground plane. All power was connected to the EUT through an Artificial Mains Network (AMN). Conducted disturbance voltage measurements on mains lines were made at the output of the AMN. The AMN was placed 0.8m from the boundary of the EUT and bonded to the reference ground plane.



2.1.5 Environmental Conditions

Ambient Temperature 25 °C
 Relative Humidity 53 %
 Atmospheric Pressure 1009.3 mbar

2.1.6 Specification Limits

Household appliances and equipment causing similar disturbances and regulating controls incorporating semiconductor devices						
Frequency range	Disturbance voltage at main terminals		Disturbance voltage at associated ports		Disturbance current at associated ports	
MHz	Quasi-peak dB μ V	Average dB μ V	Quasi-peak dB μ V	Average dB μ V	Quasi-peak dB μ A	Average dB μ A
0.15 to 0.5	66 to 56	59 to 46	80	70	40 to 30	30 to 20
0.5 to 5	56	46	74	64	30	20
5 to 30	60	50	74	64		

2.1.7 Test Results

Results for Configuration and Mode: Configuration 1 & Mode 1

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

0.15-30MHz Conducted Emission Test

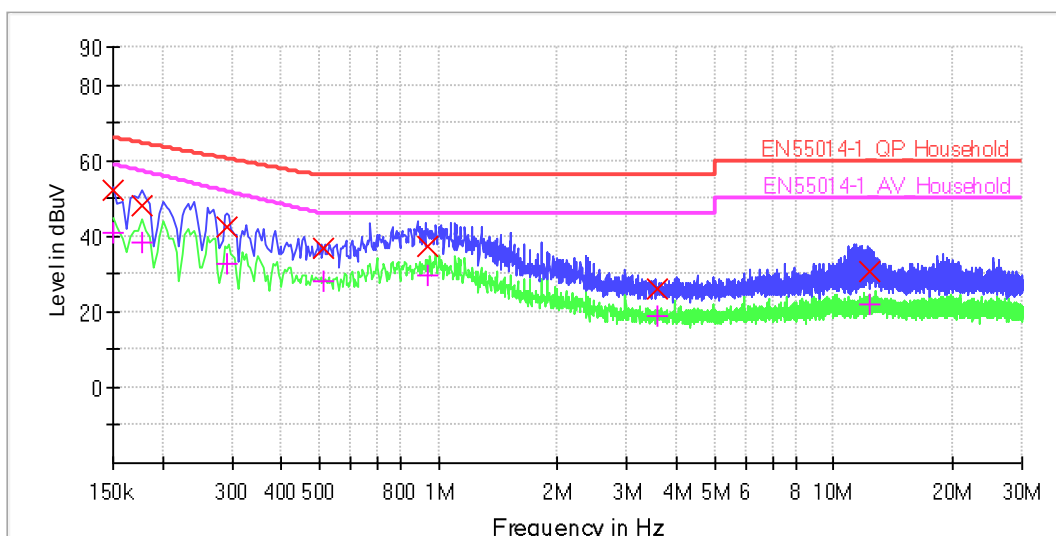
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating Conditions: Power on, Dust evacuation & charging
 Operator Name: Wang Haoyu
 Input: AC 230V 50Hz
 Sample No.: WUX-0905161-005
 Test Standard: EN 55014-1
 Comment: Phase L
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: 150K-30M [EMI conducted]

Hardware Setup: Mains Voltage LISN 2 Lines 150kHz-30MHz
 Receiver: [ESR 3]
 Level Unit: dBuV

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
150 kHz - 30 MHz	3.928 kHz	PK+ ; AVG	9 kHz	10 s	0 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Meas. Time (ms)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV)	Margin - CAV (dB)	Limit - CAV (dBuV)
0.150000	51.9	41.0	1000.0	19.6	14.1	66.0	18.0	59.0
0.178000	48.3	38.5	1000.0	19.6	16.3	64.6	18.6	57.2
0.290000	42.6	32.9	1000.0	19.7	17.9	60.5	19.0	51.9
0.514000	36.7	28.1	1000.0	19.7	19.3	56.0	17.9	46.0
0.934000	37.2	29.8	1000.0	19.7	18.8	56.0	16.2	46.0
3.578000	26.3	18.7	1000.0	19.7	29.7	56.0	27.3	46.0
12.302000	30.5	21.7	1000.0	19.8	29.5	60.0	28.3	50.0

0.15-30MHz Conducted Emission Test

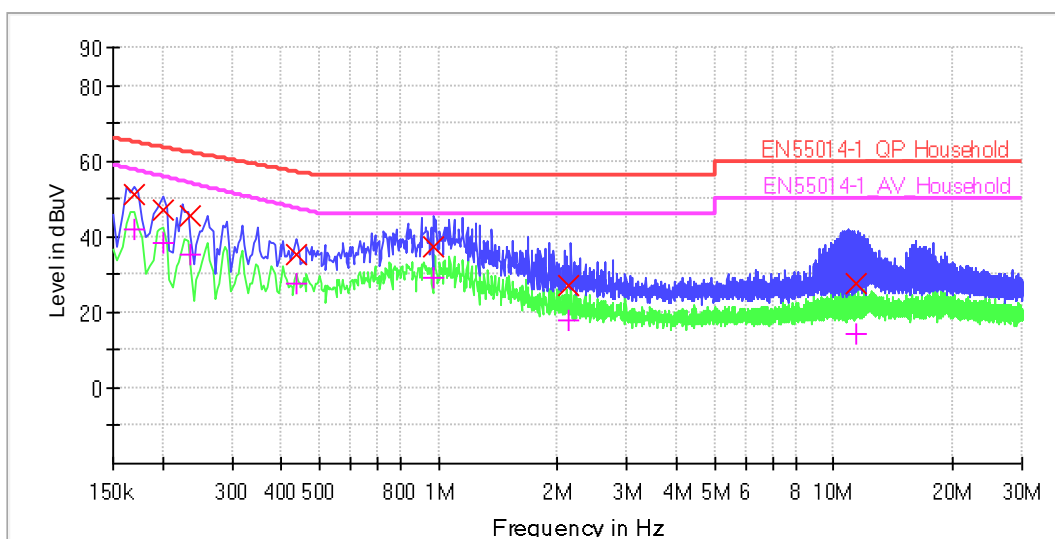
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating Conditions: Power on, Dust evacuation & charging
 Operator Name: Wang Haoyu
 Input: AC 230V 50Hz
 Sample No.: WUX-0905161-005
 Test Standard: EN 55014-1
 Comment: Phase N
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: 150K-30M [EMI conducted]

Hardware Setup: Mains Voltage LISN 2 Lines 150kHz-30MHz
 Receiver: [ESR 3]
 Level Unit: dBuV

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
150 kHz - 30 MHz	3.928 kHz	PK+ ; AVG	9 kHz	10 s	0 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Meas. Time (ms)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV)	Margin - CAV (dB)	Limit - CAV (dBuV)
0.170000	51.3	42.2	1000.0	19.6	13.6	65.0	15.5	57.6
0.202000	46.8	38.5	1000.0	19.7	16.7	63.5	17.3	55.8
0.234000	45.3	35.5	1000.0	19.7	17.0	62.3	18.7	54.2
0.438000	35.2	27.4	1000.0	19.7	21.9	57.1	20.0	47.4
0.974000	37.3	29.4	1000.0	19.7	18.7	56.0	16.6	46.0
2.142000	27.0	17.8	1000.0	19.6	29.0	56.0	28.2	46.0
11.418000	27.5	14.1	1000.0	19.8	32.5	60.0	35.9	50.0

0.15-30MHz Conducted Emission Test

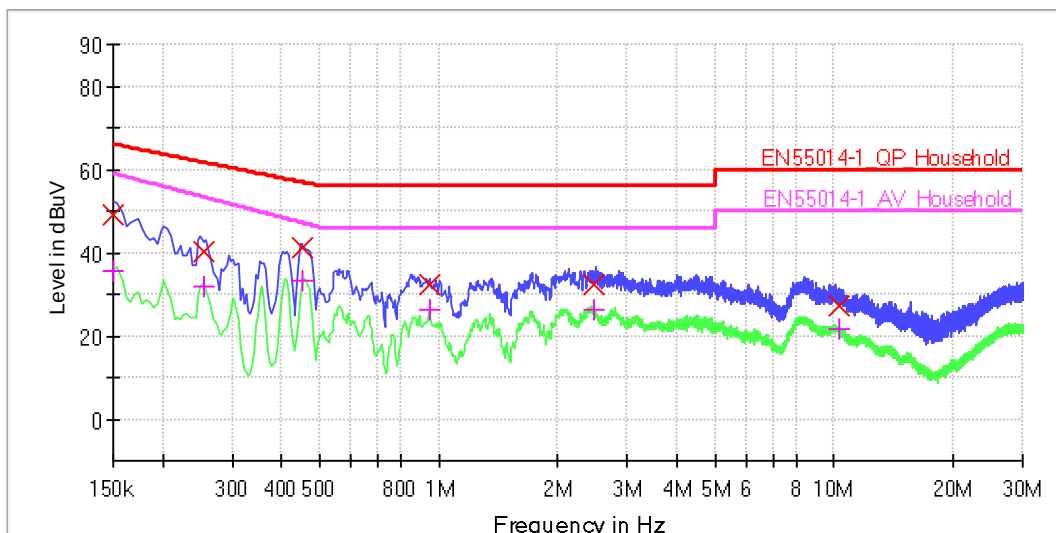
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A3A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating Conditions: Power on, Dust evacuation & charging
 Operator Name: Wang Haoyu
 Input: AC 230V 50Hz
 Sample No.: WUX-0905161-001
 Test Standard: EN 55014-1
 Comment: Phase L
 Comment: Temp.:25°C,Humi.:47%,Atm.:1016.3hPa

Scan Setup: Mains Voltage LISN 2 Lines 150kHz-30MHz Pre [EMI conducted]

Hardware Setup: Mains Voltage LISN 2 Lines 150kHz-30MHz
 Receiver: [ESW 8]
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
150 kHz - 30 MHz	4 kHz	PK+ ; AVG	9 kHz	0.01 s	0 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV)	Margin - CAV (dB)	Limit - CAV (dBuV)
0.150000	48.8	35.4	1000.0	9.000	10.5	17.2	66.0	23.6	59.0
0.254000	40.0	31.7	1000.0	9.000	10.5	21.6	61.6	21.6	53.3
0.450000	41.2	33.2	1000.0	9.000	10.5	15.7	56.9	14.0	47.1
0.950000	32.5	26.1	1000.0	9.000	10.5	23.5	56.0	19.9	46.0
2.466000	32.2	26.4	1000.0	9.000	10.6	23.8	56.0	19.6	46.0
10.286000	27.3	21.7	1000.0	9.000	10.8	32.8	60.0	28.3	50.0

0.15-30MHz Conducted Emission Test

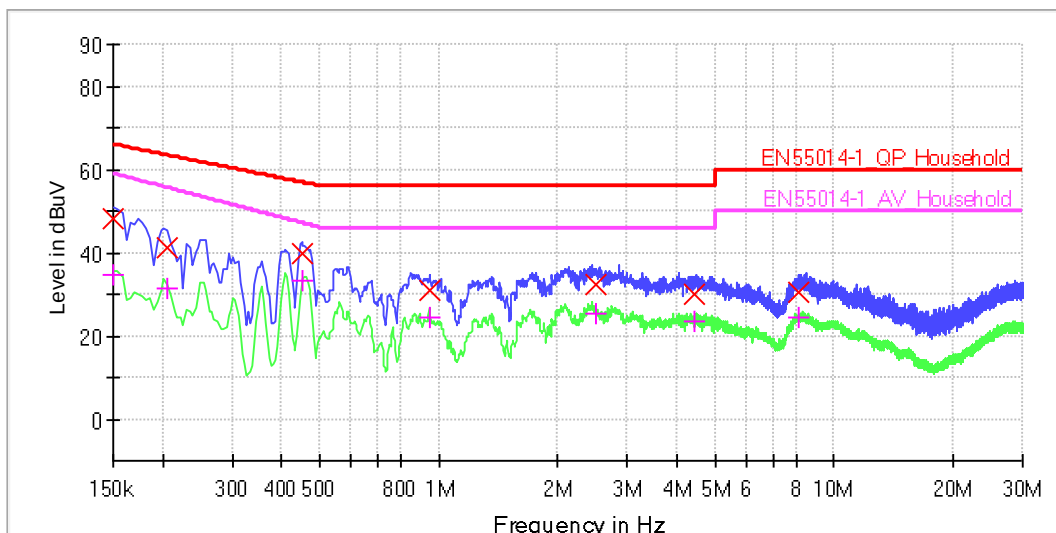
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A3A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating Conditions: Power on, Dust evacuation & charging
 Operator Name: Wang Haoyu
 Input: AC 230V 50Hz
 Sample No.: WUX-0905161-001
 Test Standard: EN 55014-1
 Comment: Phase N
 Comment: Temp.:25°C,Humi.:47%,Atm.:1016.3hPa

Scan Setup: Mains Voltage LISN 2 Lines 150kHz-30MHz Pre [EMI conducted]

Hardware Setup: Mains Voltage LISN 2 Lines 150kHz-30MHz
 Receiver: [ESW 8]
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamplifier
150 kHz - 30 MHz	4 kHz	PK+ ; AVG	9 kHz	0.01 s	0 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV)	Margin - CAV (dB)	Limit - CAV (dBuV)
0.150000	47.9	34.9	1000.0	9.000	10.5	18.1	66.0	24.1	59.0
0.206000	41.2	31.4	1000.0	9.000	10.5	22.1	63.4	24.2	55.6
0.454000	39.7	33.4	1000.0	9.000	10.5	17.1	56.8	13.7	47.0
0.954000	31.0	24.5	1000.0	9.000	10.5	25.0	56.0	21.5	46.0
2.502000	32.2	25.3	1000.0	9.000	10.6	23.8	56.0	20.7	46.0
4.442000	30.0	23.6	1000.0	9.000	10.6	26.0	56.0	22.4	46.0
8.166000	30.4	24.6	1000.0	9.000	10.7	29.6	60.0	25.4	50.0



Test Setup

2.1.8 Test Location

This test was carried out in Room 119, SR-C.

2.2 Disturbance power

2.2.1 Specification Reference

Refer to 1.3

2.2.2 Equipment Under Test

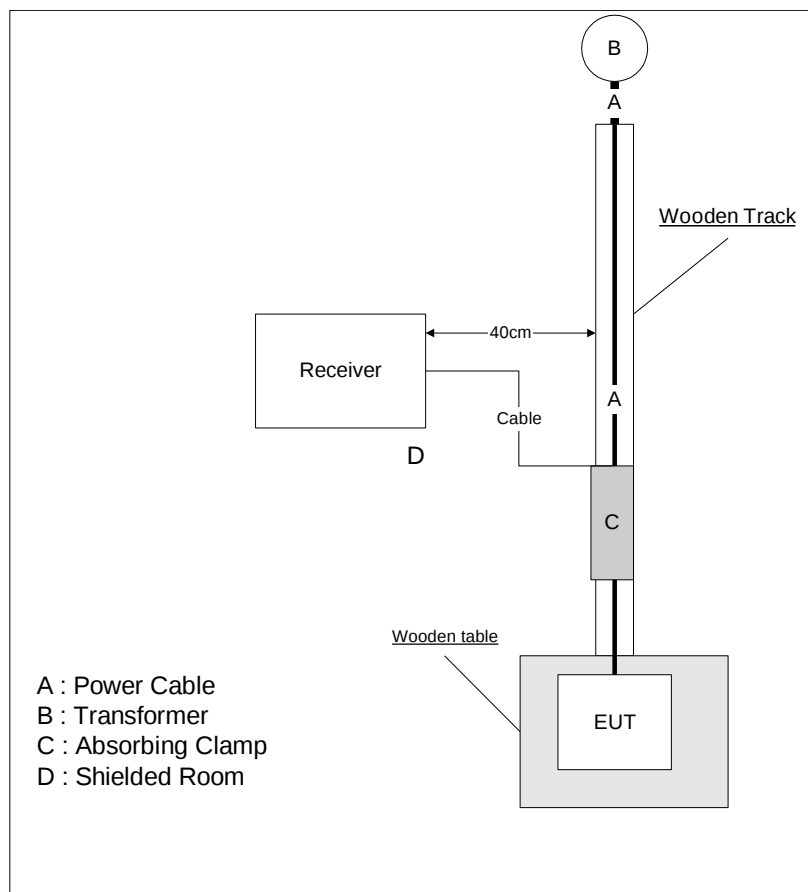
H9A2A, H9A3A

2.2.3 Date of Test

2025.05.19, 2025.05.21

2.2.4 Test Method

The associated equipment under test was placed on a non-metallic table of 0.8m above a reference ground plane and at least 0.8m from other metallic objects and from any person. The lead to be measured shall be stretched in a straight horizontal line for a length sufficient to accommodate the absorbing clamp. At each test frequency, the absorbing clamp shall be moved along the lead until the maximum value is found.



2.2.5 Environmental Conditions

Ambient Temperature 25.0 °C
 Relative Humidity 47.0 %
 Atmospheric Pressure 1016.3 mbar

2.2.6 Specification Limits

EN 55014-1

Disturbance power limits for frequency range 30MHz to 300MHz		
Frequency range	Household and similar appliances dB(pW)	
MHz	Quasi-peak	Average
30 to 300	45 to 55	35 to 45

Margin when performing disturbance power measurement in the frequency range 30MHz to 300MHz		
Frequency range	Household and similar appliances dB(pW)	
MHz	Quasi-peak	Average
	Increasing linearly with the frequency from	
200 to 300	0 to 10 dB	0

2.2.7 Test Results

Results for Configuration and Mode: Configuration 1 & Mode 1

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below

Line Under Test: Power line

30-300MHz Interference Power Test

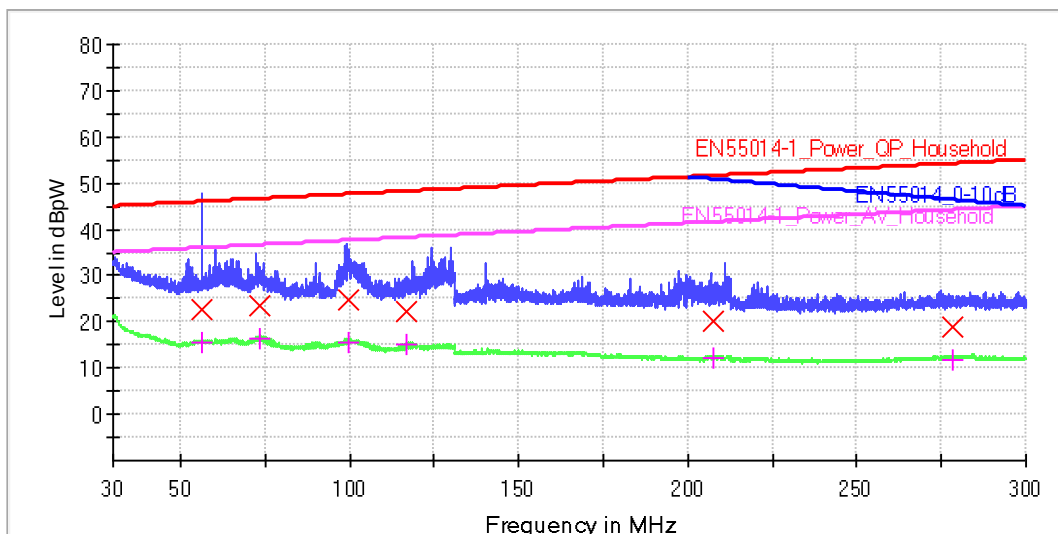
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating Conditions: Power on, Dust evacuation & charging
 Operator Name: Wang Haoyu
 Input: AC 230V 50Hz
 Sample No.: WUX-0905161-005
 Test Standard: EN 55014-1
 Comment: Temp.:25°C,Humi.:47%,Atm.:1016.3hPa

Scan Setup: Disturbances Power_30M-300M_PRE [EMI conducted]

Hardware Setup: Disturbances Power 30MHz-300MHz
 Receiver: [ESW 8]
 Level Unit: dBpW

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 300 MHz	40 kHz	PK+ ; AVG	120 kHz	0.01 s	0 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBpW)	CAverage (dBpW)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBpW)	Margin - CAV (dB)	Limit - CAV (dBpW)
56.240000	22.8	15.7	1000.0	120.000	8.5	23.2	46.0	20.3	36.0
73.400000	23.4	16.2	1000.0	120.000	7.9	23.2	46.6	20.4	36.6
99.400000	24.5	15.7	1000.0	120.000	6.8	23.0	47.6	21.9	37.6
116.920000	22.4	15.0	1000.0	120.000	6.8	25.8	48.2	23.2	38.2
207.520000	20.0	12.2	1000.0	120.000	5.5	31.6	51.6	29.4	41.6
278.520000	19.0	12.0	1000.0	120.000	5.9	35.2	54.2	32.2	44.2

30-300MHz Interference Power Test

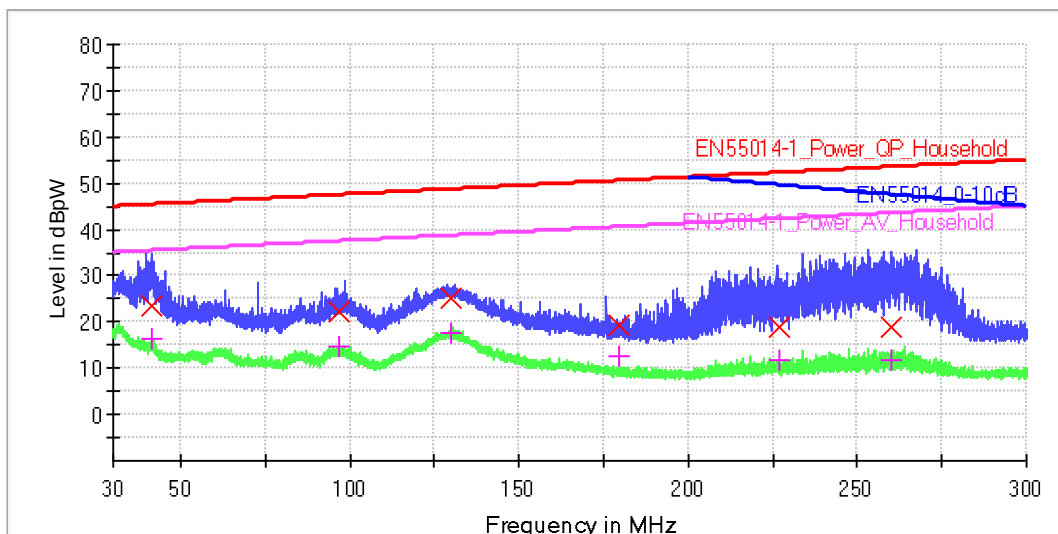
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A3A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating Conditions: Power on, Dust evacuation & charging
 Operator Name: Wang Haoyu
 Input: AC 230V 50Hz
 Sample No.: WUX-0905161-001
 Test Standard: EN 55014-1
 Comment: Temp.:25°C,Humi.:47%,Atm.:1016.3hPa

Sweep Setup: Disturbances Power_30M-300M_Pre [EMI conducted]

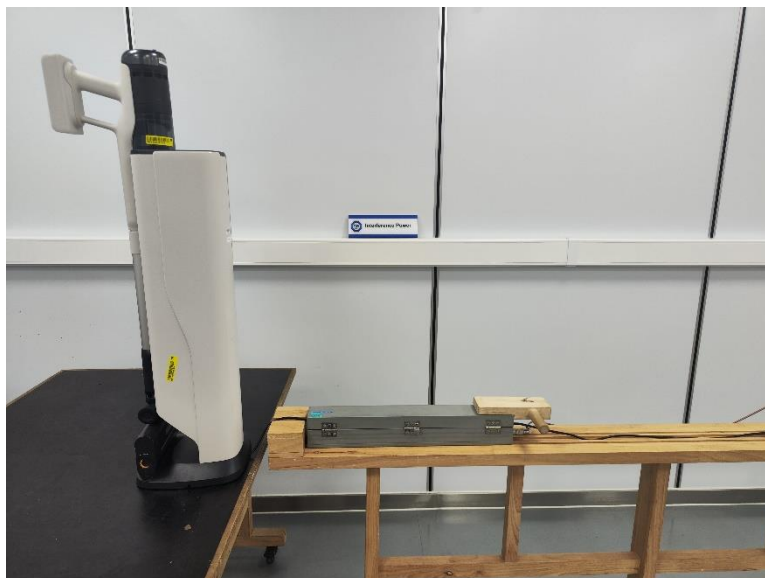
Hardware Setup: Disturbances Power 30MHz-300MHz
 Receiver: [ESW 8]
 Level Unit: dBpW

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 300 MHz	30 kHz	PK+ ; AVG	120 kHz	3 s	0 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBpW)	CAverage (dBpW)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBpW)	Margin - CAV (dB)	Limit - CAV (dBpW)
41.240000	23.5	16.4	1000.0	120.000	9.9	22.0	45.4	19.0	35.4
96.720000	22.2	14.8	1000.0	120.000	6.9	25.3	47.5	22.6	37.5
129.760000	25.1	17.6	1000.0	120.000	6.8	23.6	48.7	21.1	38.7
179.760000	19.4	12.4	1000.0	120.000	6.1	31.1	50.5	28.1	40.5
227.120000	18.7	11.7	1000.0	120.000	5.6	33.6	52.3	30.6	42.3
260.200000	18.9	11.9	1000.0	120.000	5.8	34.7	53.5	31.7	43.5



Test Setup

2.2.8 Test Location

This test was carried out in Room 119, SR-C.

2.3 Radiated Disturbance

2.3.1 Specification Reference

Refer to 1.3

2.3.2 Equipment Under Test

H9A2A, H9A3A

2.3.3 Date of Test

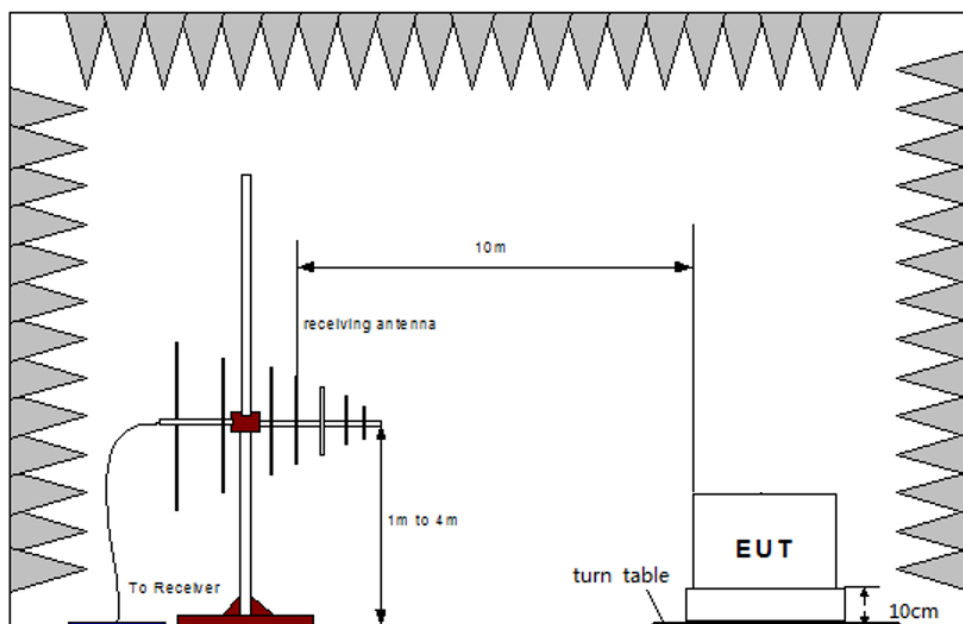
2025.04.27

2.3.4 Test Method

The EUT was set up in a semi-anechoic chamber on a remotely controlled turntable and placed on a non-conductive table 0.8m above a reference ground plane

A prescan of the EUT emissions profile was made while varying the antenna-to-EUT azimuth and antenna-to-EUT polarization using a peak detector; measurements were taken at a 10m distance. Using the prescan list of the highest emissions detected, their bearing and associated antenna polarization, the EUT was then formally measured using a Quasi-Peak detector. The readings were maximized by adjusting the antenna height, polarization and turntable azimuth, in accordance with the specification.

Below 1 GHz



2.3.5 Environmental Conditions

Ambient Temperature 25.0 °C
Relative Humidity 53.0 %
Atmospheric Pressure 1009.3 mbar

2.3.6 Specification Limits

Required Specification Limits ((@ 3m)	
Frequency Range (MHz)	Quasi-peak (dBμV/m)
30 to 230	40
230 to 1000	47

2.3.7 Test Results

Results for Configuration and Mode: Configuration 1 & Mode 1, Configuration 2 & Mode 2/3

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

30-1000MHz Radiated Emission Test

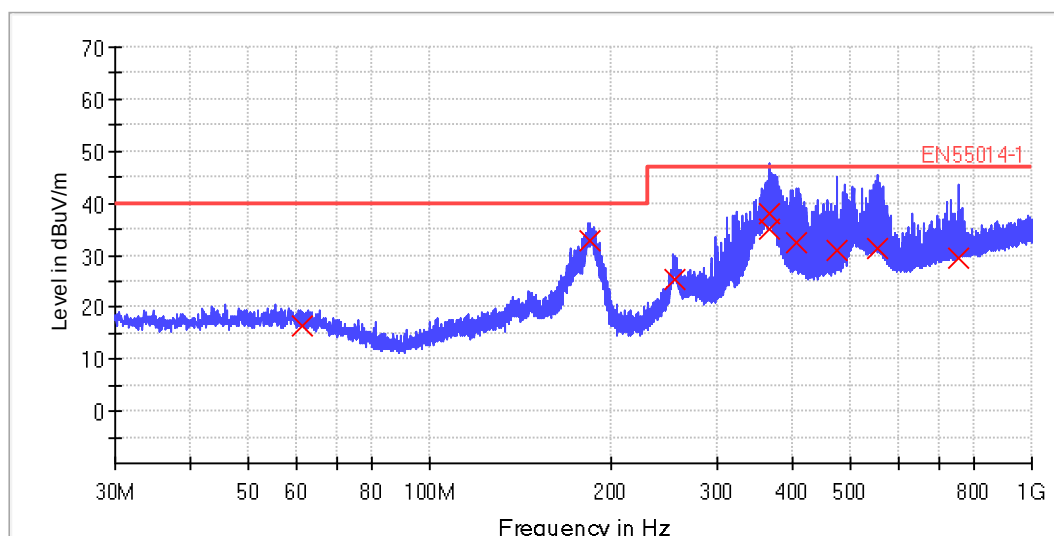
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating conditions: Power on, floor brush cleaning
 Operator name: Wang Haoyu
 Input: DC, Powered by battery
 Sample No: WUX-0905161-005
 Test standard: EN 55014-1
 Comment: Horizontal
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	2 s	20 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
61.240000	16.4	1000.0	120.000	250.0	0.0	20.4	23.6	40.0
183.880000	32.9	1000.0	120.000	250.0	279.0	19.6	7.1	40.0
255.800000	25.3	1000.0	120.000	250.0	192.0	20.7	21.7	47.0
365.720000	38.2	1000.0	120.000	250.0	304.0	24.2	8.8	47.0
367.640000	35.0	1000.0	120.000	250.0	120.0	24.3	12.0	47.0
407.560000	32.5	1000.0	120.000	250.0	9.0	25.4	14.5	47.0
476.040000	30.8	1000.0	120.000	250.0	162.0	27.3	16.2	47.0
553.640000	31.4	1000.0	120.000	250.0	0.0	28.7	15.6	47.0
756.240000	29.5	1000.0	120.000	250.0	306.0	33.2	17.5	47.0

30-1000MHz Radiated Emission Test

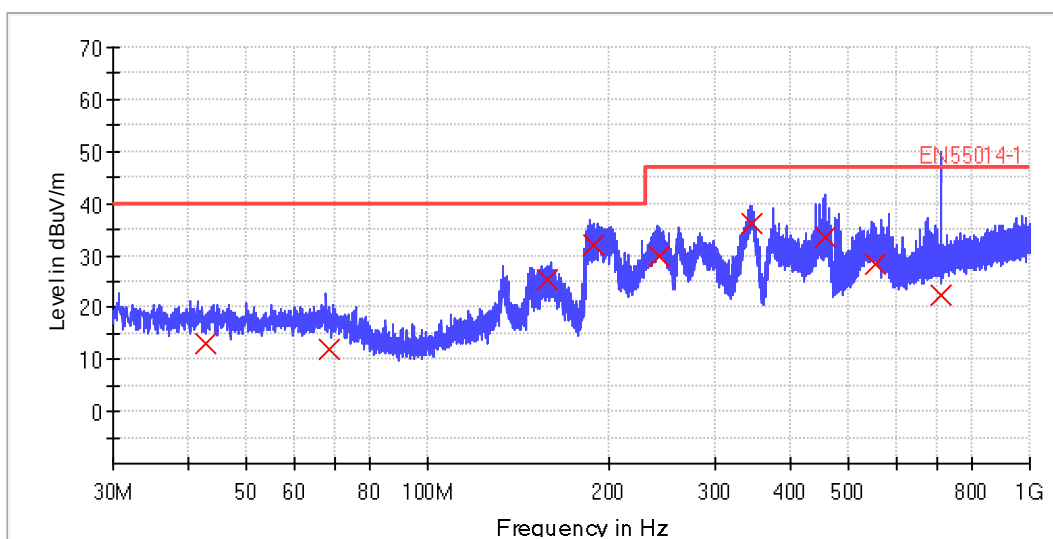
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating conditions: Power on, floor brush cleaning
 Operator name: Wang Haoyu
 Input: DC, Powered by battery
 Sample No: WUX-0905161-005
 Test standard: EN 55014-1
 Comment: Vertical
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	1 s	20 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
42.840000	12.9	1000.0	120.000	100.0	0.0	20.6	27.1	40.0
68.560000	12.0	1000.0	120.000	100.0	40.0	19.4	28.0	40.0
157.520000	25.4	1000.0	120.000	100.0	118.0	21.6	14.7	40.0
188.240000	32.2	1000.0	120.000	100.0	0.0	19.0	7.8	40.0
242.120000	29.8	1000.0	120.000	100.0	272.0	20.2	17.2	47.0
346.280000	36.2	1000.0	120.000	100.0	322.0	23.7	10.8	47.0
458.120000	33.4	1000.0	120.000	100.0	193.0	27.1	13.7	47.0
553.600000	28.4	1000.0	120.000	100.0	0.0	28.7	18.6	47.0
710.760000	22.5	1000.0	120.000	100.0	0.0	32.0	24.5	47.0

30-1000MHz Radiated Emission Test

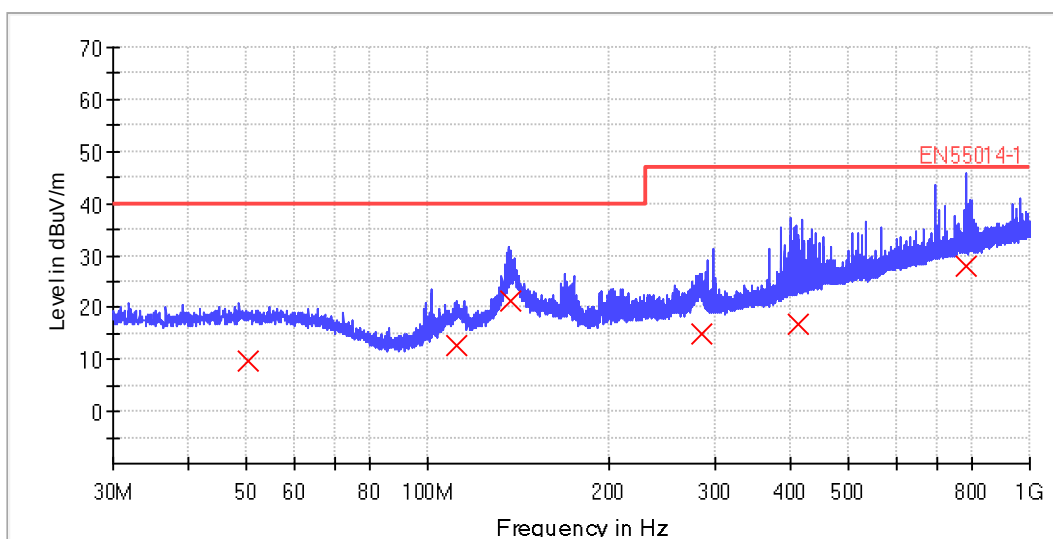
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating conditions: Power on, bed brush cleaning
 Operator name: Wang Haoyu
 Input: DC, Powered by battery
 Sample No: WUX-0905161-005
 Test standard: EN 55014-1
 Comment: Horizontal
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	2 s	20 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
50.160000	9.8	1000.0	120.000	250.0	0.0	20.9	30.2	40.0
111.280000	12.7	1000.0	120.000	250.0	0.0	18.1	27.3	40.0
137.520000	21.4	1000.0	120.000	250.0	0.0	20.6	18.6	40.0
284.200000	15.1	1000.0	120.000	250.0	0.0	22.0	31.9	47.0
412.000000	16.9	1000.0	120.000	250.0	0.0	25.5	30.1	47.0
786.320000	27.9	1000.0	120.000	250.0	0.0	33.4	19.1	47.0

30-1000MHz Radiated Emission Test

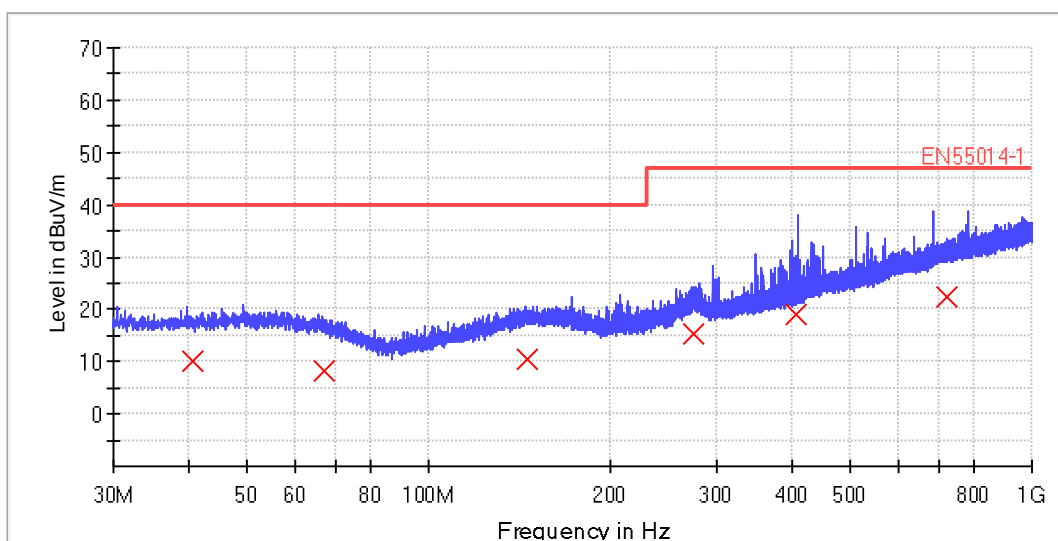
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A2A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating conditions: Power on, bed brush cleaning
 Operator name: Wang Haoyu
 Input: DC, Powered by battery
 Sample No: WUX-0905161-005
 Test standard: EN 55014-1
 Comment: Vertical
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	2 s	20 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
40.640000	10.0	1000.0	120.000	108.0	0.0	20.4	30.0	40.0
67.200000	8.4	1000.0	120.000	108.0	125.0	19.6	31.6	40.0
145.520000	10.3	1000.0	120.000	108.0	0.0	21.2	29.7	40.0
274.760000	15.4	1000.0	120.000	108.0	0.0	21.7	31.6	47.0
406.560000	19.0	1000.0	120.000	108.0	338.0	25.4	28.0	47.0
722.960000	22.4	1000.0	120.000	108.0	195.0	32.2	24.6	47.0

30-1000MHz Radiated Emission Test

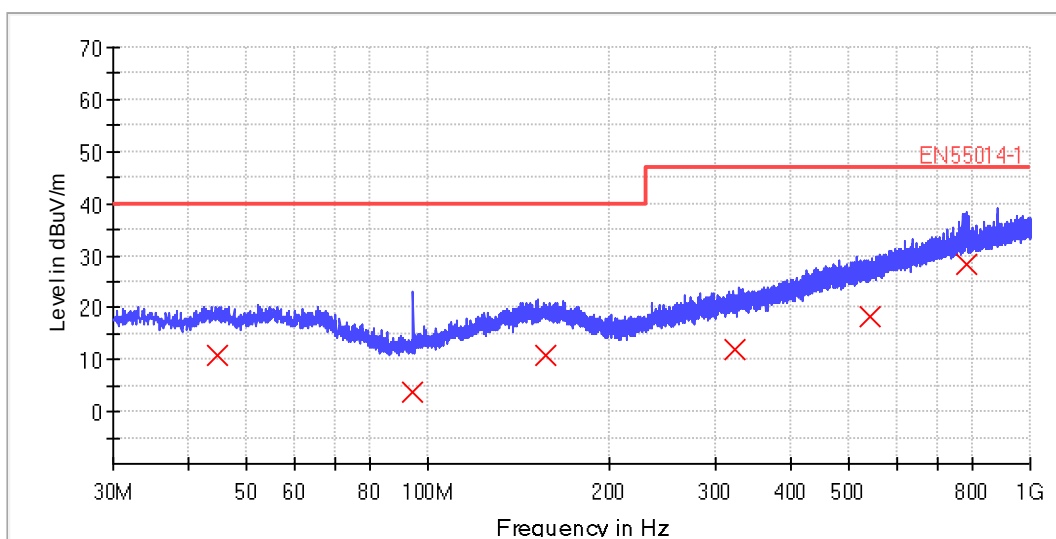
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A3A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating conditions: Power on, floor brush cleaning
 Operator name: Wang Haoyu
 Input: DC, Powered by battery
 Sample No: WUX-0905161-004
 Test standard: EN 55014-1
 Comment: Horizontal
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	2 s	20 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
44.640000	10.7	1000.0	120.000	250.0	110.0	20.7	29.3	40.0
94.520000	3.8	1000.0	120.000	250.0	174.0	15.7	36.2	40.0
156.880000	10.8	1000.0	120.000	250.0	211.0	21.6	29.2	40.0
322.280000	11.8	1000.0	120.000	250.0	249.0	23.3	35.2	47.0
541.280000	18.1	1000.0	120.000	250.0	298.0	28.5	28.9	47.0
786.640000	28.3	1000.0	120.000	250.0	322.0	33.4	18.7	47.0

30-1000MHz Radiated Emission Test

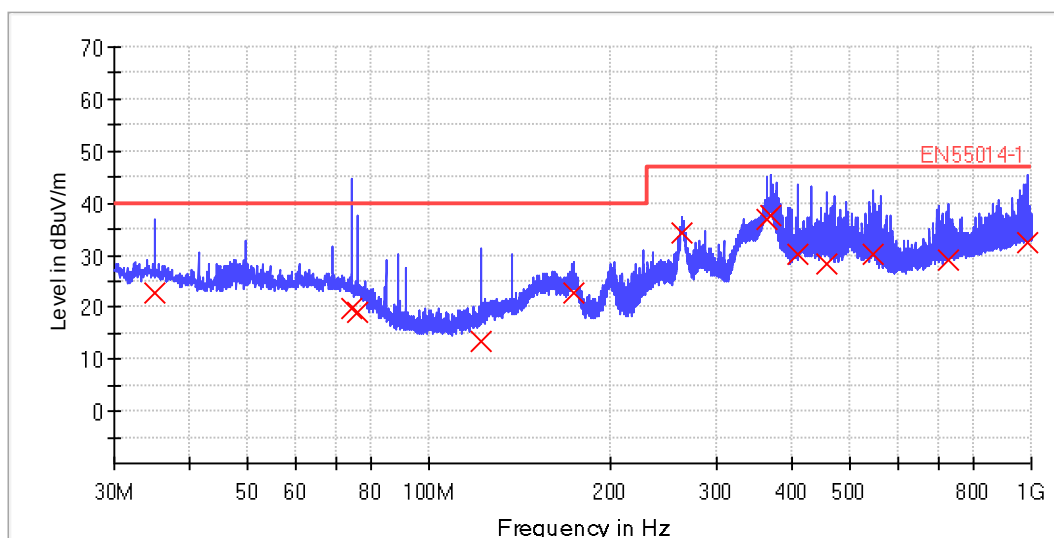
Common Information

EUT: Cordless Stick Vacuum Cleaner
 Model: H9A3A
 Client: Shenzhen Roborock Innovation Technology Co.,Ltd.
 Operating conditions: Power on, floor brush cleaning
 Operator name: Wang Haoyu
 Input: DC, Powered by battery
 Sample No: WUX-0905161-004
 Test standard: EN 55014-1
 Comment: Vertical
 Comment: Temp.:25°C,Humi.:53%,Atm.:1009.3hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

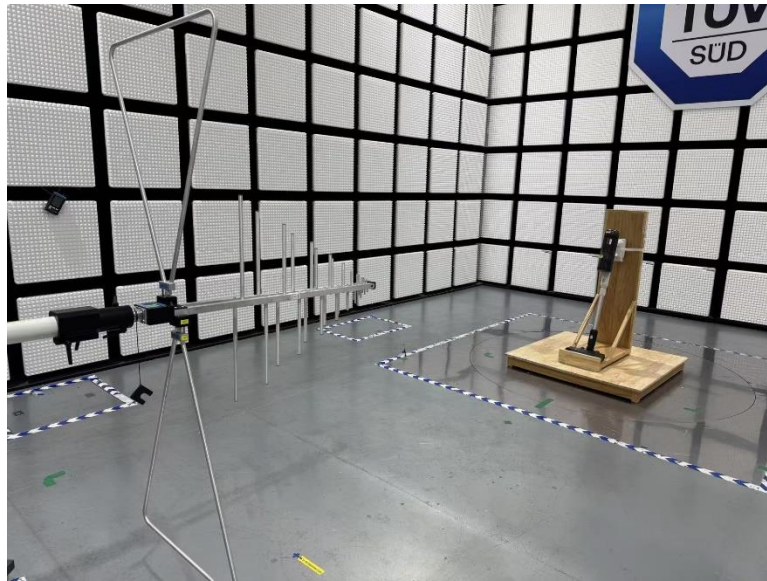
Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	2 s	20 dB



Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
35.080000	22.7	1000.0	120.000	100.0	145.0	19.8	17.3	40.0
74.560000	19.6	1000.0	120.000	100.0	276.0	18.0	20.4	40.0
76.080000	18.9	1000.0	120.000	100.0	42.0	17.6	21.1	40.0
122.040000	13.5	1000.0	120.000	100.0	105.0	19.3	26.5	40.0
173.880000	22.9	1000.0	120.000	100.0	359.0	20.8	17.1	40.0
263.400000	34.2	1000.0	120.000	100.0	0.0	21.0	12.8	47.0
364.680000	37.0	1000.0	120.000	100.0	324.0	24.1	10.0	47.0
370.000000	37.6	1000.0	120.000	100.0	171.0	24.4	9.4	47.0
408.840000	30.0	1000.0	120.000	100.0	249.0	25.5	17.0	47.0
456.520000	28.2	1000.0	120.000	100.0	121.0	27.0	18.8	47.0
545.080000	30.2	1000.0	120.000	100.0	13.0	28.6	16.8	47.0
728.600000	29.0	1000.0	120.000	100.0	286.0	32.4	18.0	47.0
984.200000	32.6	1000.0	120.000	100.0	192.0	35.9	14.4	47.0



Test Setup

2.3.1 Test Location

This test was carried out in Room 132, 3m SAC.

2.4 Harmonic current emission

2.4.1 Specification Reference

Refer to 1.3

2.4.2 Equipment Under Test

H9A2A, H9A3A

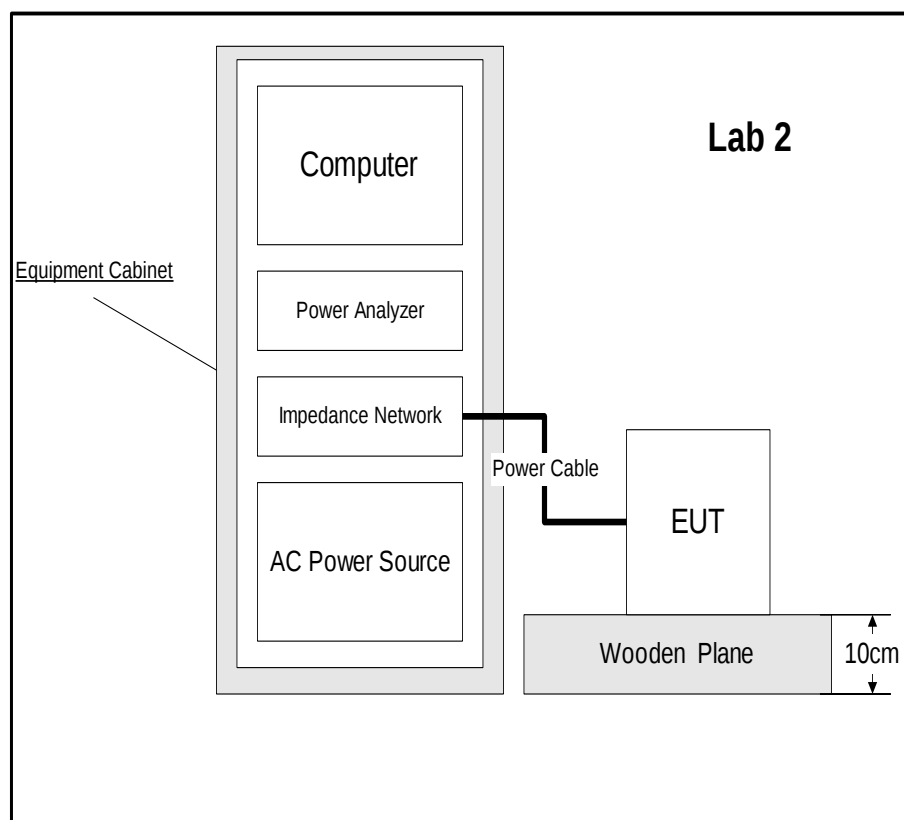
2.4.3 Date of Test

2025.05.06, 2025.05.21

2.4.4 Test Method

Harmonic current test should be conducted with the user's operation control or automatic programs set to the mode expected to produce the maximum total harmonic current under normal operating conditions.

Specific test conditions for the measurement of harmonic currents associated with some types of equipment are given in Annex C.



2.4.5 Environmental Conditions

Ambient Temperature	22.0 °C
Relative Humidity	53.0 %
Atmospheric Pressure	1008.0 mbar

2.4.6 Specification Limits

Limits for class A Equipment	
Harmonic order n	Maximum permissible harmonic current A
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
$15 \leq n \leq 39$	$0.15(15/n)$
Even harmonics	
2	1.08
4	0.43
6	0.30
$8 \leq n \leq 40$	$0.23(8/n)$

2.4.7 Test Results

Results for Configuration and Mode: With Auto-Empty Dock: Configuration 1 & Operation mode 1.

Performance assessment of the EUT made during this test: *Pass*.

Detailed results are shown below.

Classification of EUT: Class A

EUT: Cordless Stick Vacuum Cleaner

Tested by: Wang Haoyu

Test category: Class-A (European limits)

Test Margin: 100

Test date: 2025.05.06

Start time: 15:07:08

End time: 15:09:51

Test duration (min): 2.5

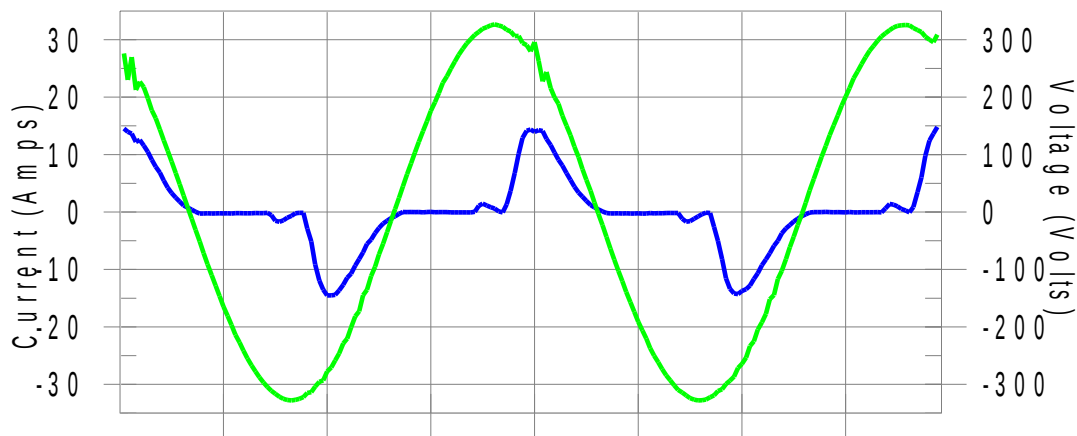
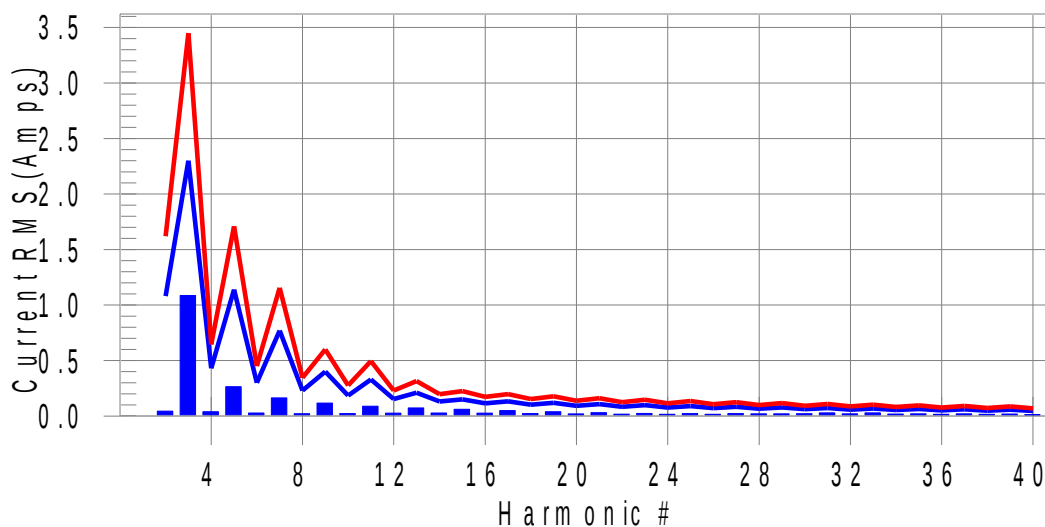
Data file name: CTSMXL_H-000247.cts_data

Comment: Power on, Dust evacuation & charging ; Model: H9A2A; T:22°C, H:53%, P:1008hPa; SN: WUX-0905161-005

Customer: Shenzhen Roborock Innovation Technology Co., Ltd.

Test Result: Pass

Source qualification: Normal

Current & voltage waveforms**Harmonics and Class A limit line****European Limits****Test result: Pass Worst harmonics H3-45.4% of 150% limit, H3-47.2% of 100% limit.**

Current Test Result Summary (Run time)

EUT: Cordless Stick Vacuum Cleaner
 Test category: Class-A (European limits)
 Test date: 2025.05.06 Start time: 15:07:08 End time: 15:09:51
 Test duration (min): 2.5 Data file name: CTSXML_H-000247.cts_data
 Comment: Power on, Dust evacuation & charging; Model: H9A2A; T: 22°C, H: 53%, P: 1008hPa; SN: WUX-0905161-005
 Customer: Shenzhen Roborock Innovation Technology Co., Ltd.

Test Result: Pass Source qualification: Normal
 THC(A): 1.152 I-THD(%): 24.6 POHC(A): 0.078 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts):	230.947	Frequency(Hz):	50.00
I_Peak (Amps):	16.507	I_RMS (Amps):	6.220
I_Fund (Amps):	4.677	Crest Factor:	7.215
Power (Watts):	1078.1	Power Factor:	0.973

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.044	1.080	4.1	0.096	1.620	5.9	Pass
3	1.086	2.300	47.2	1.565	3.450	45.4	Pass
4	0.039	0.430	9.2	0.089	0.645	13.8	Pass
5	0.264	1.140	23.1	0.744	1.710	43.5	Pass
6	0.028	0.300	N/A	0.073	0.450	N/A	Pass
7	0.164	0.770	21.3	0.403	1.155	34.9	Pass
8	0.021	0.230	N/A	0.056	0.345	N/A	Pass
9	0.116	0.400	29.1	0.271	0.600	45.1	Pass
10	0.023	0.184	N/A	0.042	0.276	N/A	Pass
11	0.088	0.330	26.8	0.180	0.495	36.3	Pass
12	0.026	0.153	N/A	0.034	0.230	N/A	Pass
13	0.073	0.210	34.8	0.128	0.315	40.7	Pass
14	0.028	0.131	N/A	0.036	0.197	N/A	Pass
15	0.061	0.150	40.4	0.096	0.225	42.9	Pass
16	0.026	0.115	N/A	0.038	0.173	N/A	Pass
17	0.050	0.132	37.7	0.066	0.198	33.5	Pass
18	0.023	0.102	N/A	0.037	0.153	N/A	Pass
19	0.039	0.118	33.0	0.051	0.178	28.9	Pass
20	0.019	0.092	N/A	0.033	0.138	N/A	Pass
21	0.031	0.107	28.7	0.038	0.161	23.9	Pass
22	0.017	0.084	N/A	0.031	0.125	N/A	Pass
23	0.024	0.098	N/A	0.032	0.147	N/A	Pass
24	0.016	0.077	N/A	0.029	0.115	N/A	Pass
25	0.022	0.090	N/A	0.030	0.135	N/A	Pass
26	0.017	0.071	N/A	0.028	0.107	N/A	Pass
27	0.022	0.083	N/A	0.029	0.125	N/A	Pass
28	0.020	0.066	N/A	0.036	0.099	N/A	Pass
29	0.020	0.078	N/A	0.027	0.116	N/A	Pass
30	0.021	0.061	N/A	0.040	0.092	N/A	Pass
31	0.029	0.073	40.0	0.036	0.109	33.3	Pass
32	0.020	0.058	N/A	0.036	0.086	N/A	Pass
33	0.029	0.068	N/A	0.037	0.102	N/A	Pass
34	0.018	0.054	N/A	0.024	0.081	N/A	Pass
35	0.020	0.064	N/A	0.024	0.096	N/A	Pass
36	0.016	0.051	N/A	0.025	0.077	N/A	Pass
37	0.021	0.061	N/A	0.026	0.091	N/A	Pass
38	0.016	0.048	N/A	0.024	0.073	N/A	Pass
39	0.018	0.058	N/A	0.023	0.087	N/A	Pass
40	0.012	0.046	N/A	0.018	0.069	N/A	Pass

EUT: Cordless Stick Vacuum Cleaner

Test category: Class-A (European limits)

Test date: 2025.05.21

Start time: 15:49:36

Tested by: Wang Haoyu

Test Margin: 100

End time: 15:52:18

Test duration (min): 2.5

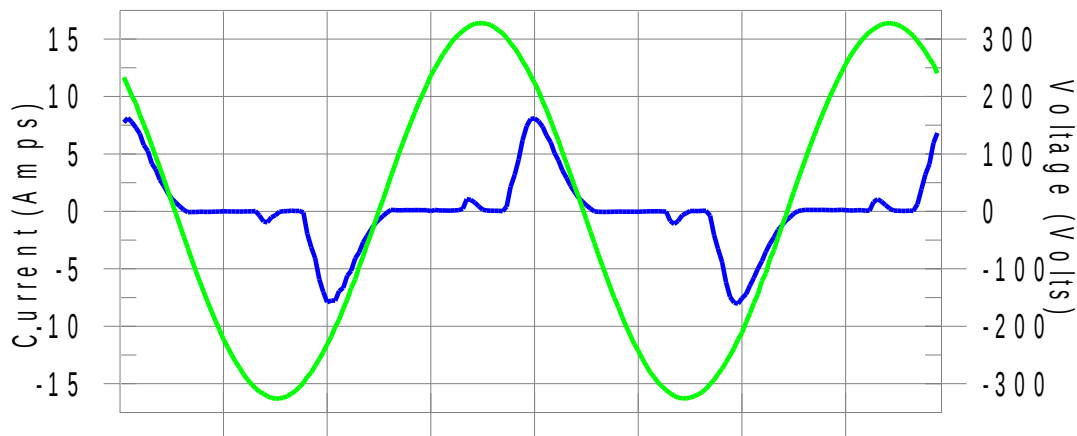
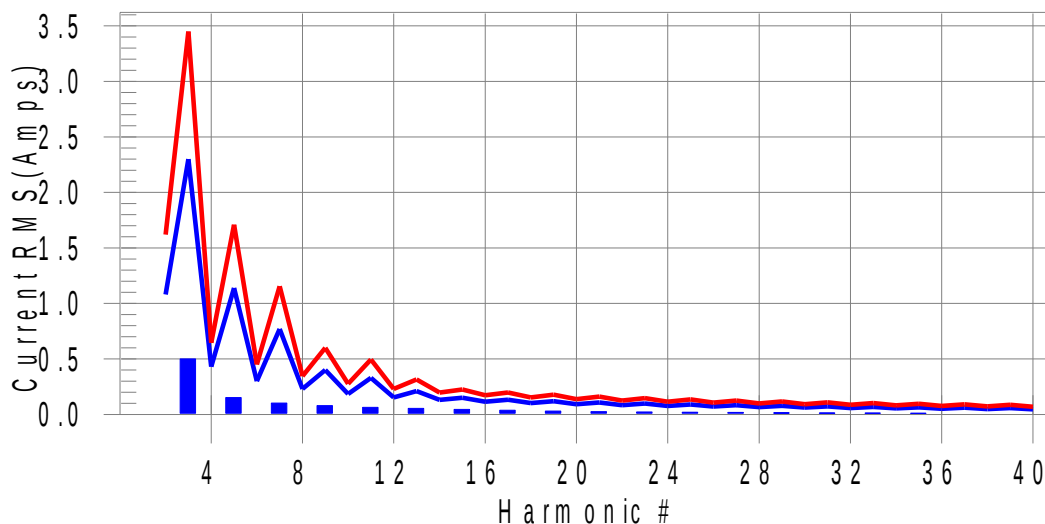
Data file name: CTSMXL_H-000485.cts_data

Comment: Power on, Dust evacuation & charging; Model: H9A3A; T: 22°C, H: 53%, P: 1008hPa; SN: WUX-0905161-001

Customer: Shenzhen Roborock Innovation Technology Co., Ltd.

Test Result: Pass

Source qualification: Normal

Current & voltage waveforms**Harmonics and Class A limit line****European Limits****Test result: Pass Worst harmonics H3-24.6% of 150% limit, H15-29.8% of 100% limit.**

Current Test Result Summary (Run time)

EUT: Cordless Stick Vacuum Cleaner
 Test category: Class-A (European limits)
 Test date: 2025.05.21 Start time: 15:49:36 End time: 15:52:18
 Test duration (min): 2.5 Data file name: CTSMXL_H-000485.cts_data
 Comment: Power on, Dust evacuation & charging; Model: H9A3A; T:22°C, H:53%, P:1008hPa; SN: WUX-0905161-001
 Customer: Shenzhen Roborock Innovation Technology Co., Ltd.

Test Result: Pass Source qualification: Normal
 THC(A): 0.552 I-THD(%): 19.6 POHC(A): 0.053 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts):	230.945	Frequency(Hz):	50.00
I_Peak (Amps):	8.235	I_RMS (Amps):	3.256
I_Fund (Amps):	2.817	Crest Factor:	7.768
Power (Watts):	656.0	Power Factor:	0.978

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.009	1.080	N/A	0.039	1.620	N/A	Pass
3	0.500	2.300	21.8	0.850	3.450	24.6	Pass
4	0.010	0.430	N/A	0.044	0.645	N/A	Pass
5	0.153	1.140	13.4	0.409	1.710	23.9	Pass
6	0.008	0.300	N/A	0.039	0.450	N/A	Pass
7	0.102	0.770	13.3	0.214	1.155	18.5	Pass
8	0.007	0.230	N/A	0.029	0.345	N/A	Pass
9	0.079	0.400	19.9	0.139	0.600	23.1	Pass
10	0.005	0.184	N/A	0.021	0.276	N/A	Pass
11	0.064	0.330	19.3	0.092	0.495	18.5	Pass
12	0.005	0.153	N/A	0.015	0.230	N/A	Pass
13	0.054	0.210	25.9	0.065	0.315	20.8	Pass
14	0.004	0.131	N/A	0.012	0.197	N/A	Pass
15	0.045	0.150	29.8	0.055	0.225	24.4	Pass
16	0.004	0.115	N/A	0.010	0.173	N/A	Pass
17	0.037	0.132	28.4	0.045	0.198	22.9	Pass
18	0.004	0.102	N/A	0.008	0.153	N/A	Pass
19	0.031	0.118	26.0	0.038	0.178	21.6	Pass
20	0.004	0.092	N/A	0.009	0.138	N/A	Pass
21	0.026	0.107	24.2	0.033	0.161	20.7	Pass
22	0.004	0.084	N/A	0.008	0.125	N/A	Pass
23	0.022	0.098	22.6	0.030	0.147	20.3	Pass
24	0.004	0.077	N/A	0.008	0.115	N/A	Pass
25	0.020	0.090	22.1	0.027	0.135	19.9	Pass
26	0.004	0.071	N/A	0.008	0.107	N/A	Pass
27	0.018	0.083	21.4	0.024	0.125	19.2	Pass
28	0.004	0.066	N/A	0.007	0.099	N/A	Pass
29	0.015	0.078	N/A	0.022	0.116	N/A	Pass
30	0.004	0.061	N/A	0.007	0.092	N/A	Pass
31	0.013	0.073	N/A	0.020	0.109	N/A	Pass
32	0.004	0.058	N/A	0.007	0.086	N/A	Pass
33	0.012	0.068	N/A	0.018	0.102	N/A	Pass
34	0.004	0.054	N/A	0.007	0.081	N/A	Pass
35	0.011	0.064	N/A	0.016	0.096	N/A	Pass
36	0.004	0.051	N/A	0.006	0.077	N/A	Pass
37	0.010	0.061	N/A	0.014	0.091	N/A	Pass
38	0.005	0.048	N/A	0.006	0.073	N/A	Pass
39	0.008	0.058	N/A	0.013	0.087	N/A	Pass
40	0.004	0.046	N/A	0.008	0.069	N/A	Pass



Test setup

2.4.8 Test Location

This test was carried out in Room 134, Harmonic & Flicker Test area.

2.5 Flicker

2.5.1 Specification Reference

Refer to 1.3

2.5.2 Equipment Under Test

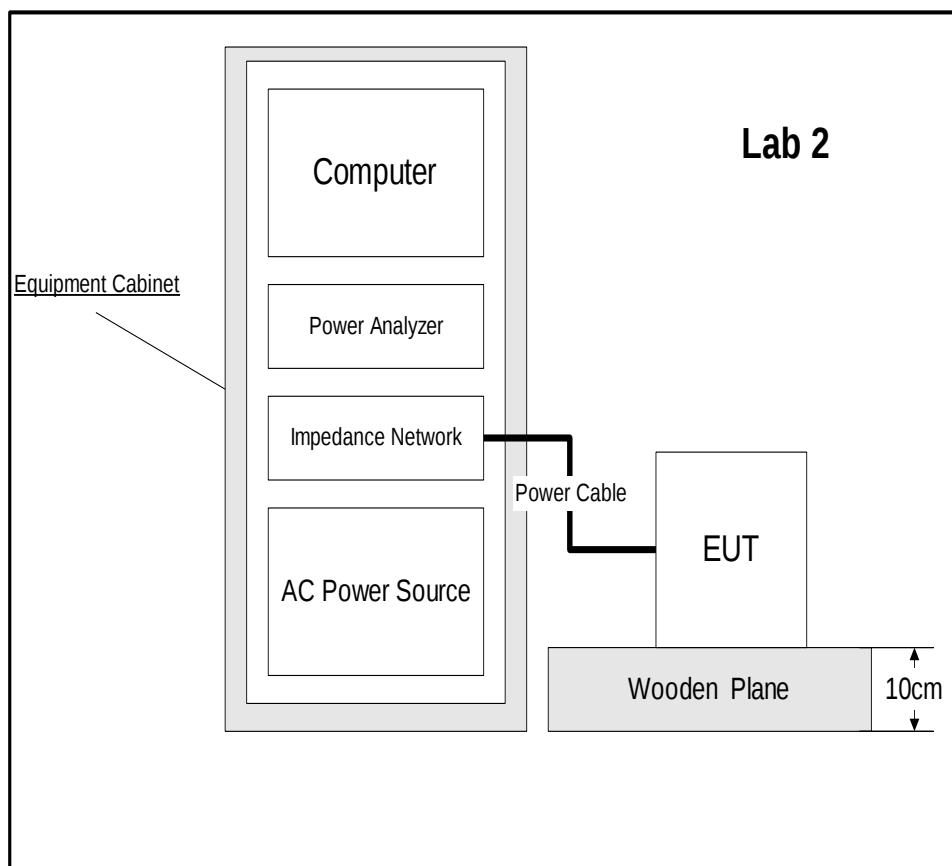
H9A2A, H9A3A

2.5.3 Date of Test

2025.05.06, 2025.05.21

2.5.4 Test Method

For equipment not mentioned in annex A, controls or automatic programs should be set to produce the most unfavorable sequence of voltage change, using only those combinations of controls and programmes which are mentioned by the manufacturer in the instruction manual, or are otherwise likely to be used



2.5.5 Environmental Conditions

Ambient Temperature	22.0 °C
Relative Humidity	53.0 %
Atmospheric Pressure	1008.0 mbar

2.5.6 Specification Limits

The value of P_{st} shall not be greater than 1.0

The value of P_{lt} shall not be greater than 0.65

T_{max} , the accumulated time value of $d(t)$ with a deviation exceeding 3.3% during a single voltage change at the EUT terminals, shall not exceed 500ms

The maximum relative steady-state voltage change, d_c , shall not exceed 3.3%

The maximum relative voltage change d_{max} , shall not exceed

- a) 4% without additional conditions
- b) 6% for equipment which is:
 - Switched manually, or
 - Switched automatically more frequently than twice per day, and also has either a delayed start, or manual restart, after a power supply interruption
- c) 7% for equipment which is:
 - Attended whilst in use, or
 - Switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart or manual restart, after a power supply interruption

2.5.7 Test Results

Results for Configuration and Mode: With Auto-Empty Dock: Configuration 1 & Operation mode1.

Performance assessment of the EUT made during this test: *Pass*.

Detailed results are shown below.

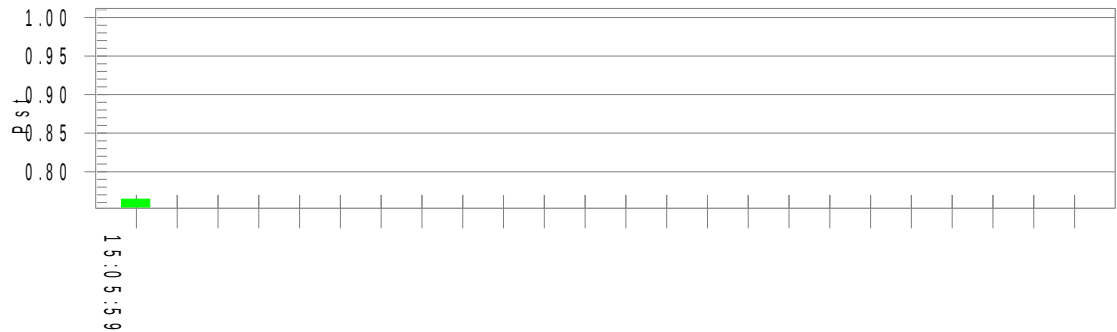


EUT: Cordless Stick Vacuum Cleaner
Test category: dt,dmax,dc and Pst (European limits)
Test date: 2025.05.06 Start time: 14:55:38 End time: 15:06:05
Test duration (min): 10 Data file name: CTSMXL_F-000246.cts_data
Comment: Power on, Dust evacuation & charging;Model: H9A2A;T:22°C,H:53%,P:1008hPa;SN: WUX-0905161-005
Customer: Shenzhen Roborock Innovation Technology Co.,Ltd.

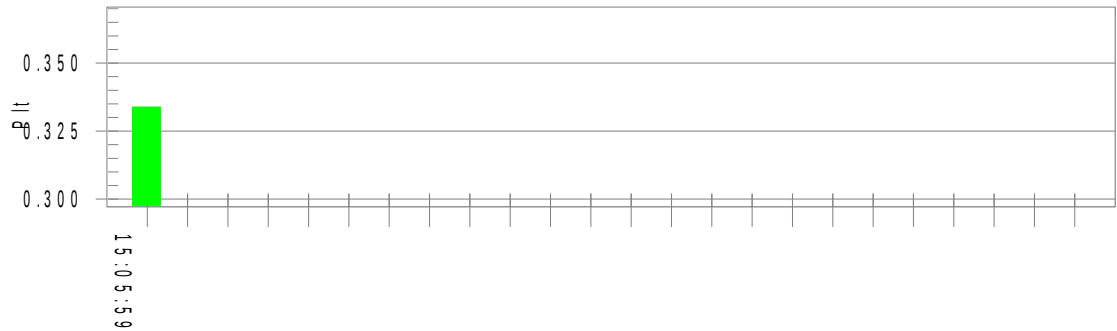
Test Result: Pass Status: Test Completed

Pst and limit line

European Limits



Plt and limit line



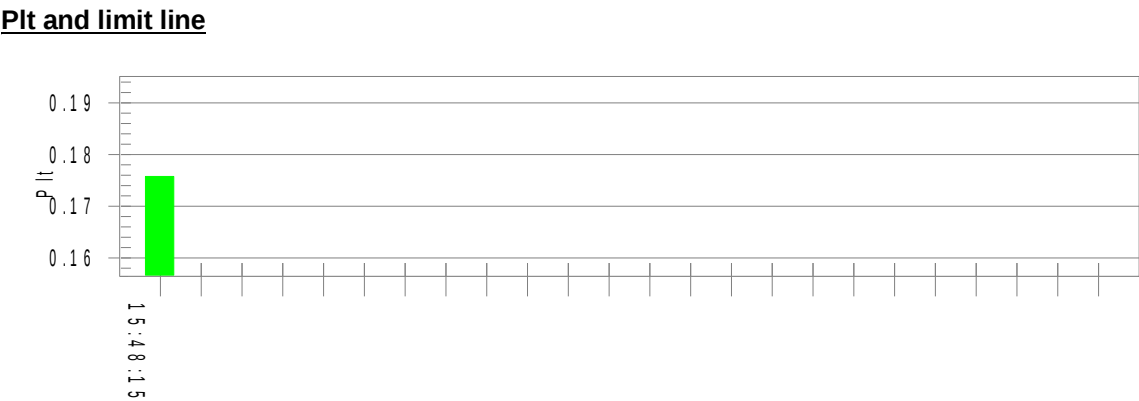
Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.90		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	1.69	Test limit (%):	7.00 Pass
Highest Pst (10 min. period):	0.764	Test limit:	1.000 Pass



EUT: Cordless Stick Vacuum Cleaner
Test category: dt,dmax,dc and Pst (European limits)
Test date: 2025.05.21 Start time: 15:37:54 End time: 15:48:22
Test duration (min): 10 Data file name: CTSMXL_F-000484.cts_data
Comment: Power on, Charging and drying;Model: H9A3A;T:22°C,H:53%,P:1008hPa;SN: WUX-0905161-001
Customer: Shenzhen Roborock Innovation Technology Co.,Ltd.

Test Result: Pass Status: Test Completed



Parameter values recorded during the test:

Vrms at the end of test (Volt):	231.05		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.57	Test limit (%):	3.30 Pass
Highest dmax (%):	0.88	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.402	Test limit:	1.000 Pass



Test setup

2.5.8 Test Location

This test was carried out in in Room 134, Harmonic & Flicker Test area.

2.6 Electrostatic discharge immunity test

2.6.1 Specification Reference

Refer to 1.3

2.6.2 Equipment Under Test

H9A2A, H9A3A

2.6.3 Date of Test

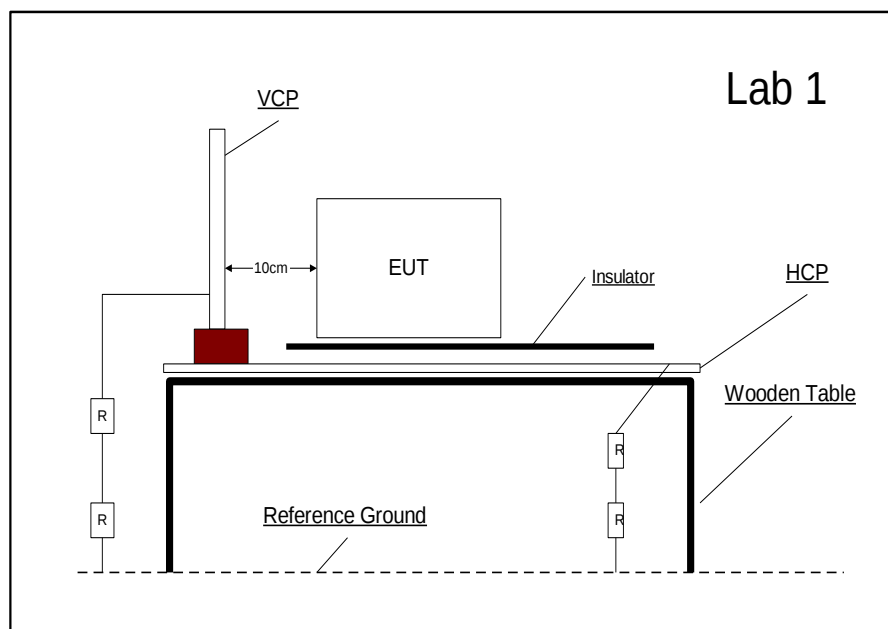
2025.05.15

2.6.4 Test Method

The equipment under test including associated cabling was configured on but insulated from, using a 0.5mm isolator, a horizontal coupling plane fitted to the top of a 0.8m non-conductive table for table-top equipment; and on a 0.1m insulated support for floor standing equipment; above a ground reference plane all within a test laboratory.

Using the air discharge method for non-metallic parts, contact discharge method for metallic parts with both vertical and horizontal couple plane discharge methods for the sides of the equipment under test, the required electrostatic discharge voltage levels in both voltage polarities were applied at the detailed pulse repartition rate.

During this testing any anomalies in the equipment under tests performance was recorded.



2.6.5 Environmental Conditions

Ambient Temperature 21.4°C
 Relative Humidity 48.2 %
 Atmospheric Pressure 1023.5 mbar

2.6.6 Specification Limits

Required Test Levels				Performance Criteria
Discharge type	Discharge Level (kV)		Number of discharges per location (each polarity)	
	Positive	Negative		
Air – Direct	2, 4 and 8	2, 4 and 8	<10>	B
Contact – Direct	2 and 4	2 and 4	<10>	B
Contact – Indirect	2 and 4	2 and 4	<10>	B

2.6.7 Test Results

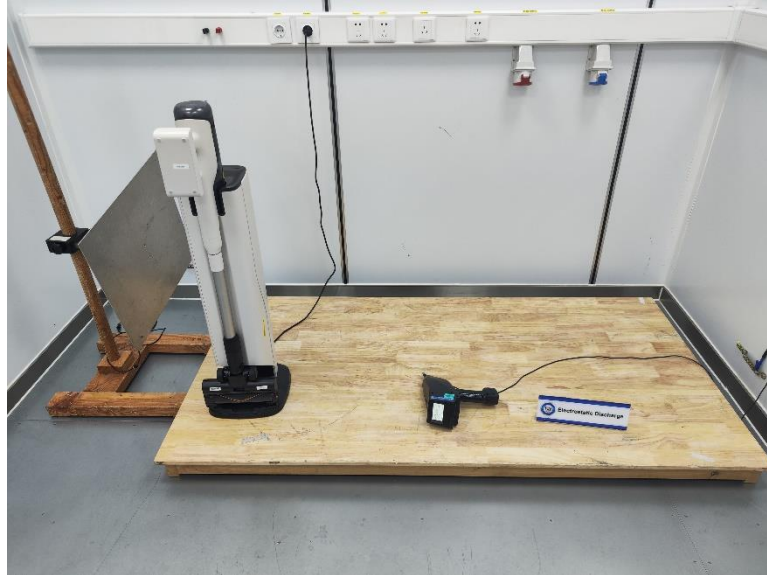
Results for Configuration and Mode: Configuration 1 & operation 1,
 Configuration 2 & operation 2/3

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

ID	Test Point	Discharge	Results									
			2kV		4kV		6kV		8kV		15kV	
			+	-	+	-	+	-	+	-	+	-
1	HCP	Contact	✓	✓	✓	✓						
2	VCP	Contact	✓	✓	✓	✓						
3	Bolt	Contact	✓	✓	✓	✓						
4	Gap	Air	✓*	✓*	✓*	✓*			✓*	✓*		
5	button	Air	✓*	✓*	✓*	✓*			✓*	✓*		

Key to Results	
✓	The EUTs performance was not impacted when the ESD pulse was applied.
✓*	No discharge occurred at this point when the ESD pulse was applied
Ox	
Fx	
N/A	Not Appliance



Test Setup

2.6.8 Test Location

This test was carried out in room 127, ESD-TR.

2.7 Radiated, radio-frequency, electromagnetic field immunity test

2.7.1 Specification Reference

Refer to 1.3

2.7.2 Equipment Under Test

H9A2A, H9A3A

2.7.3 Date of Test

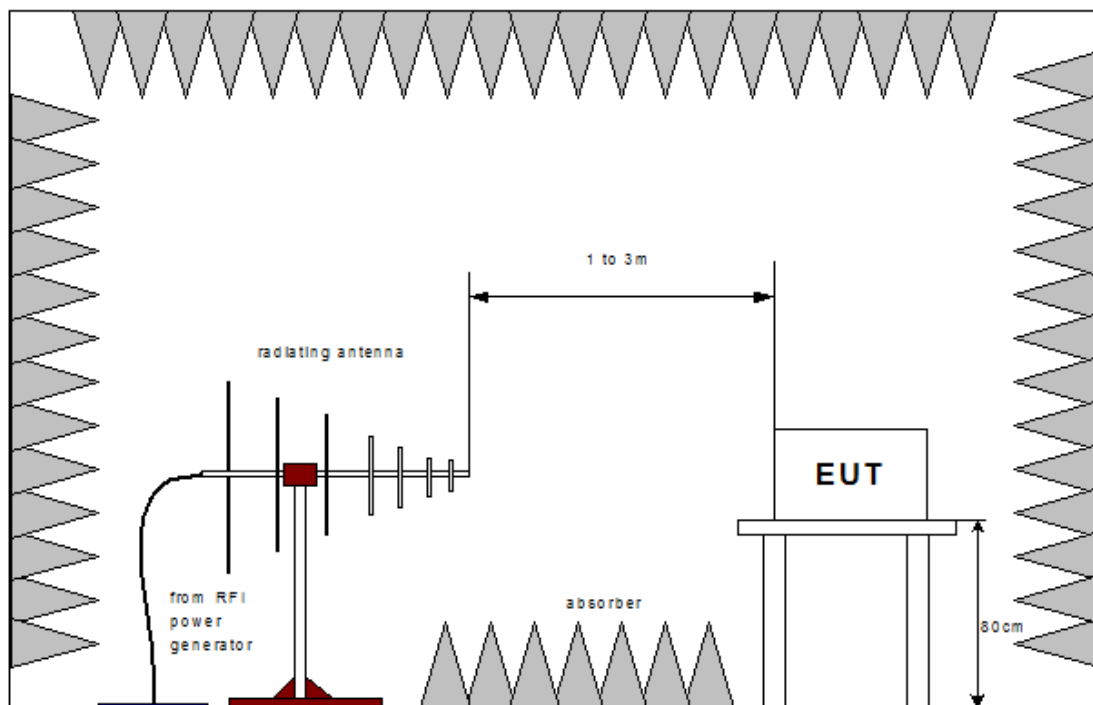
2025.05.16

2.7.4 Test Method

The equipment under test including associated cabling was configured, on a 0.8 m non-conductive table for table-top equipment and on a 0.1 m insulated support for floor standing equipment; with a pre-calibrated semi anechoic chamber.

All four side of the equipment under test were subjected to the required RF field strength, modulated as described, swept over the frequency range of test with the antenna positioned in both horizontal and vertical polarizations.

During this testing any anomalies in the equipment under tests performance was recorded.



2.7.5 Environmental Conditions

Ambient Temperature 20.9 °C
 Relative Humidity 48.6 %
 Atmospheric Pressure 1018.4 mbar

2.7.6 Specification Limits

Required Test Levels					Performance Criteria
Frequency Range (MHz)	Level (V/m)	Modulation	Step Size (%)	Dwell (s)	
80 to 1000	3	AM (80 %, 1 kHz, sine wave)	1	3	A
Note 1. EUT powered at one of the Nominal input voltages and frequencies					

2.7.7 Test Results

Results for Configuration and Mode: Configuration 1 & operation 1,
 Configuration 2 & operation 2/3

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for RF Electromagnetic Field 80 - 1000 MHz				
Side of the equipment under test	Antenna polarization	Test Level	Dwell Time	Result
Front, rear, left, right	horizontal	3 V/m	3 s	Pass PC A
Front, rear, left, right	vertical	3 V/m	3 s	Pass PC A



Test Setup

2.7.8 Test Location

This test was carried out in Room 137, 3m SAC.

2.8 Electrical fast transient /burst immunity test

2.8.1 Specification Reference

Refer to 1.3

2.8.2 Equipment Under Test

H9A2A, H9A3A

2.8.3 Date of Test

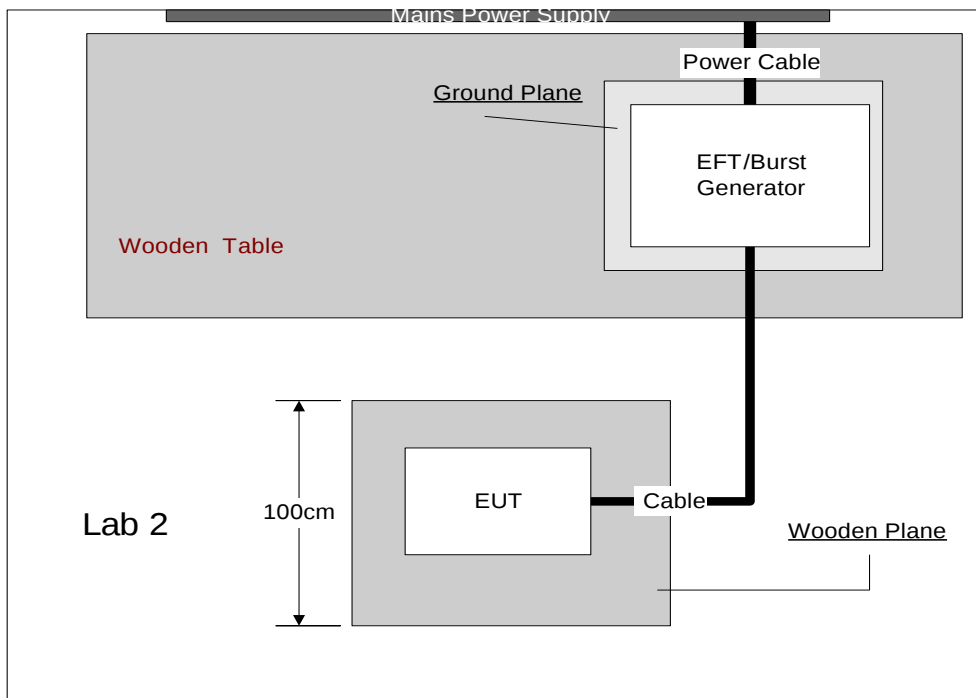
2025.05.15

2.8.4 Test Method

The equipment under test including associated cabling was configured on but insulated from, using a 0.1 m isolator, a horizontal coupling plane fitted to the top of a 0.8 m non-conductive table for table-top equipment; and on a 0.1 m insulated support for floor standing equipment; above a ground reference plane all within a test laboratory.

Using a CDN for power ports, capacitive coupling clamp for signal and control ports and a 33nF coupling capacitor for earth ports, the required fast transient burst voltage levels in both voltage polarities were applied at the detailed pulse repartition rate and duration of test.

During this testing any anomalies in the equipment under tests performance was recorded.



2.8.5 Environmental Conditions

Ambient Temperature	21.4°C
Relative Humidity	48.2 %
Atmospheric Pressure	1023.5 mbar

2.8.6 Specification Limits

Required Test Levels Input and output a.c. power ports					Performance Criteria
Line Under Test	Level (kV)	Repetition Rate (kHz)	Test Duration	Coupling Method	
AC power port	± 1	5 kHz	2 min per polarity	Direct	B
For extra low voltage a.c. ports and output a.c. ports, this testing is only applicable to ports interfacing with cables whose total length may exceed 3m according to the manufacturer's functional specification.					

2.8.7 Test Results

Results for Configuration and Mode: Configuration 1 & operation 1

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Fast Transient Burst Immunity					
Line under test	Test Level	Repetition Rate	Test Duration	Coupling Method	Result
Power line	± 0.5 & 1.0 kV	5 kHz	2 min	CDN	Pass PC A



Test Setup

2.8.8 Test Location

This test was carried out in Room 120, SR-C.

2.9 Surge immunity test

2.9.1 Specification Reference

Refer to 1.3

2.9.2 Equipment Under Test

H9A2A, H9A3A

2.9.3 Date of Test

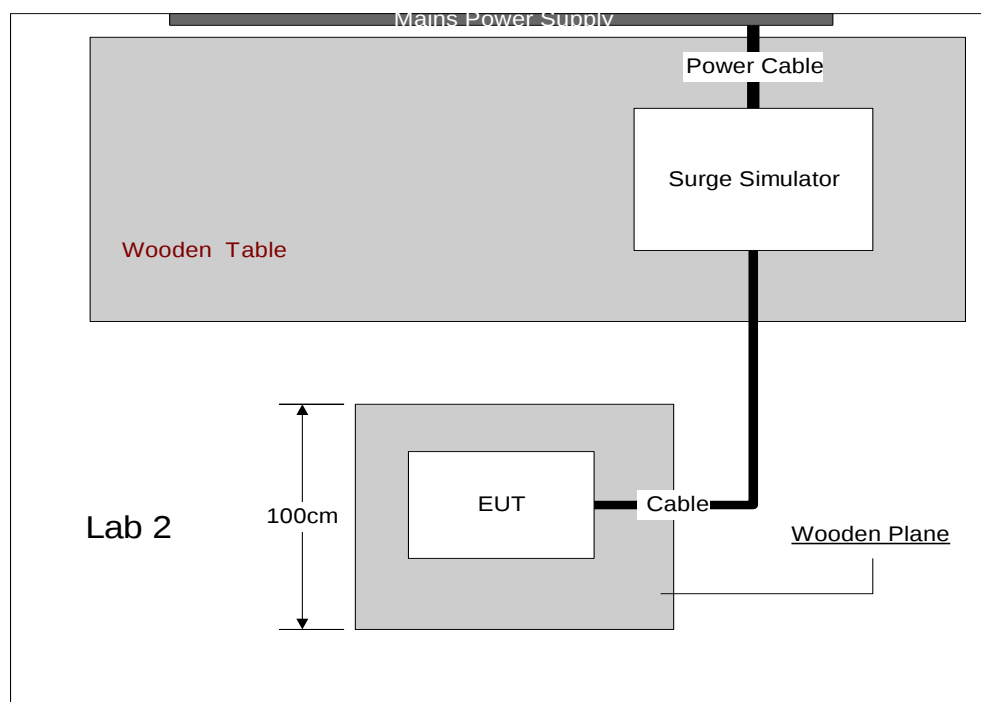
2025.05.15

2.9.4 Test Method

The equipment under test including associated cabling was configured, on a 0.8 m non-conductive table for table-top equipment and on a 0.1 m insulated support for floor standing equipment above a ground reference plane all within a test laboratory.

Using CDNs for power ports and appropriate coupling methods for applicable signal and control ports, the required number of surges was applied for each surge voltage level using both positive and negative surge voltage polarities. Surges were applied at the power line frequency phase angles and repartition rates detailed.

During this testing any anomalies in the equipment under tests performance was recorded.



2.9.5 Environmental Conditions

Ambient Temperature 21.4°C
 Relative Humidity 48.2 %
 Atmospheric Pressure 1023.5 mbar

2.9.6 Specification Limits

Characteristics	Test Levels	Performance Criteria
Wave- shape data Test levels line to line with 2Ω impedance line to earth with 12Ω impedance	1.2/50 μs ± 1.0 kV ±2.0 kV	B
Note In addition to the specified test level, all lower levels as detailed in IEC 61000-4-5 should also be satisfied.		

2.9.7 Test Results

Results for Configuration and Mode: Configuration 1 & operation 1

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Surge Immunity (Power Ports)							
Line Name	Coupling	Level	Polarity	Phase Angle	No of Pulses	Repetition Rate	Result
Power line	Live to Neutral	-1.0kV	NEGATIVE	270 deg	5	60 sec	Pass PC A
Power line	Live to Neutral	+1.0kV	POSITIVE	90 deg	5	60 sec	Pass PC A



Test Setup

2.9.8 Test Location

This test was carried out in Room 120, SR-C.

2.10 Immunity to conducted disturbances, induced by radio-frequency fields

2.10.1 Specification Reference

Refer to 1.3

2.10.2 Equipment Under Test

H9A2A, H9A3A

2.10.3 Date of Test

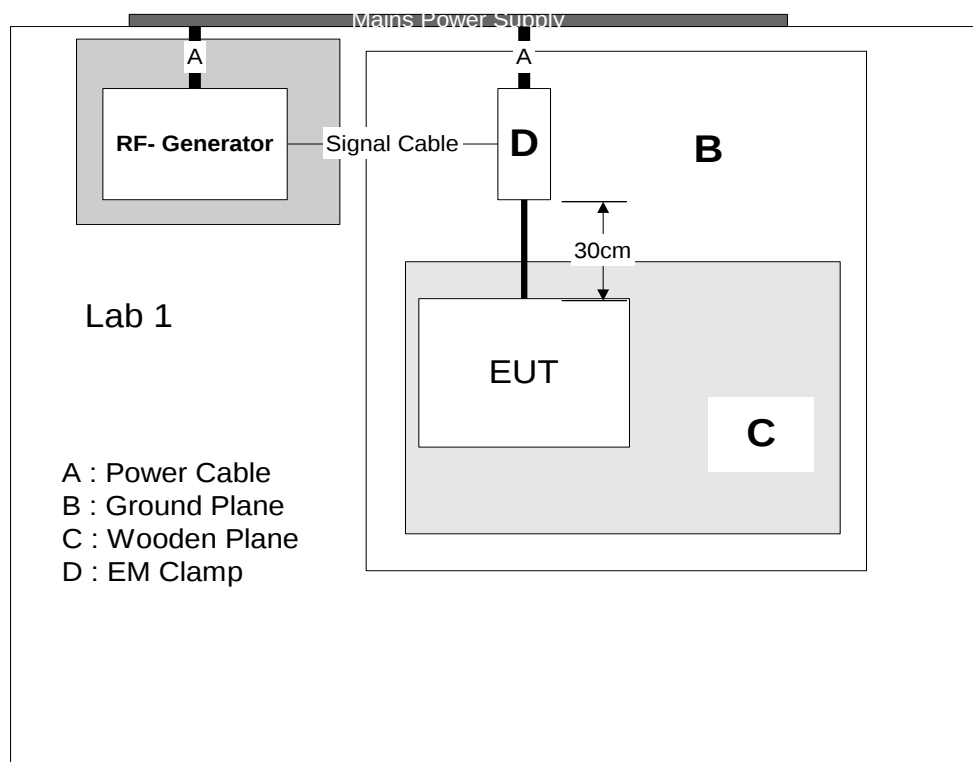
2025.05.15

2.10.4 Test Method

The equipment under test was configured, on but insulated from, using a 0.1 m isolator, a horizontal coupling plane fitted to the top of a 0.8 m non-conductive table for table-top equipment; and on a 0.1 m insulated support for floor standing equipment; above a ground reference plane all within a test laboratory.

All associated cabling was configured, on but insulated from, using a 50 mm isolator, the same horizontal coupling plane as the equipment under test.

Using CDNs, EM Clamps or current clamps as appropriate, the power ports and applicable signal and control ports were subjected to the required, pre calibrated RF injected signal strength, modulated as described, swept over the frequency range of test. During this testing any anomalies in the equipment under tests performance was recorded.



2.10.5 Environmental Conditions

Ambient Temperature 21.4°C
 Relative Humidity 48.2 %
 Atmospheric Pressure 1023.5 mbar

2.10.6 Specification Limits

Required Test Levels Input and output a.c. power ports						Performance Criteria
Line Under Test	Frequency Range (MHz)	Level (V)	Modulation	Step Size (%)	Dwell (s)	
AC power port	0.15 to 230	3	AM (80 %,1 kHz, sine wave)	1	3	A
For extra low voltage a.c. ports and output a.c. ports, this testing is only applicable to ports interfacing with cables whose total length may exceed 3m according to the manufacturer's functional specification.						

2.10.7 Test Results

Results for Configuration and Mode: Configuration 1 & operation 1

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Injected current						
Line under test	Test Level	Step	Dwell Time	Coupling Method	Modulation	Result
Power line	3V	1%	3S	CDN	1KHZ 80%	Pass PC A



Test Setup

2.10.8 Test Location

This test was carried out Room 120, SR-C.

2.11 Voltage dips, short interruptions and voltage variations immunity tests

2.11.1 Specification Reference

Refer to 1.3

2.11.2 Equipment Under Test

H9A2A, H9A3A

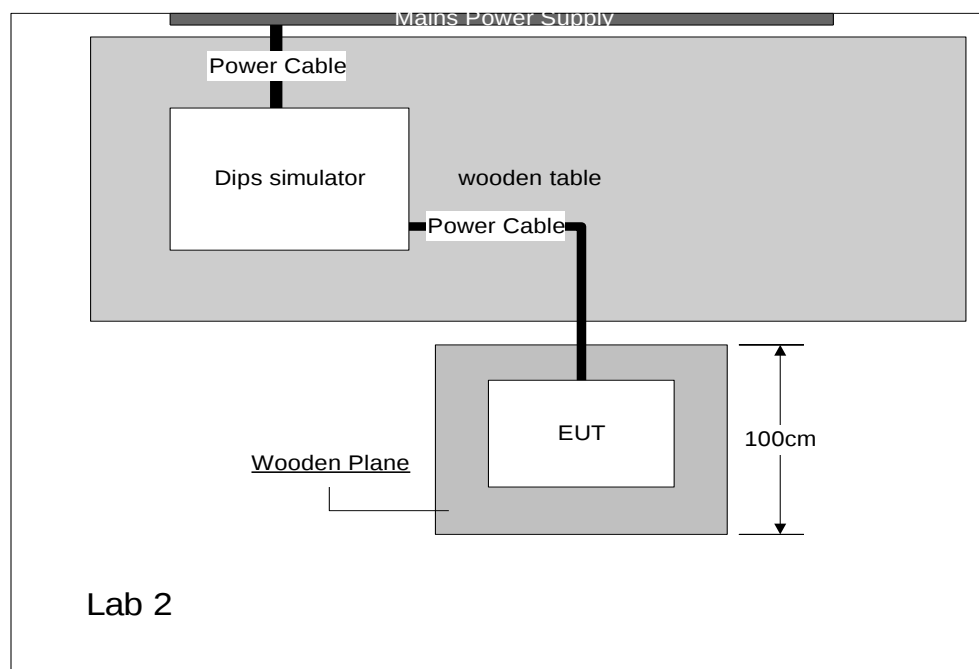
2.11.3 Date of Test

2025.05.15

2.11.4 Test Method

The equipment under test including associated cabling was configured, on a 0.8 m non-conductive table for table-top equipment and on a 0.1 m insulated support for floor standing equipment above a ground reference plane all within a test laboratory.

Using a programmable power supply the equipment under test was subjected to the detailed supply voltage dips and interruptions. The required supply phase synchronization and test repetition rate, detailed, was controlled by the programmable power supply. During this testing any anomalies in the equipment under tests performance was recorded.



2.11.5 Environmental Conditions

Ambient Temperature	21.4°C
Relative Humidity	48.2 %
Atmospheric Pressure	1023.5 mbar

2.11.6 Specification Limits

Voltage dips & interruption				
Voltage Dip in % Ut	Test level in % Ut	Duration		Performance Criteria
		50Hz	60Hz	
100	0	½ cycle	½ cycle	B
60	40	10 cycles	12 cycles	B
30	70	25 cycles	30 cycles	B
Ut is the rated voltage of the Equipment Under Test				

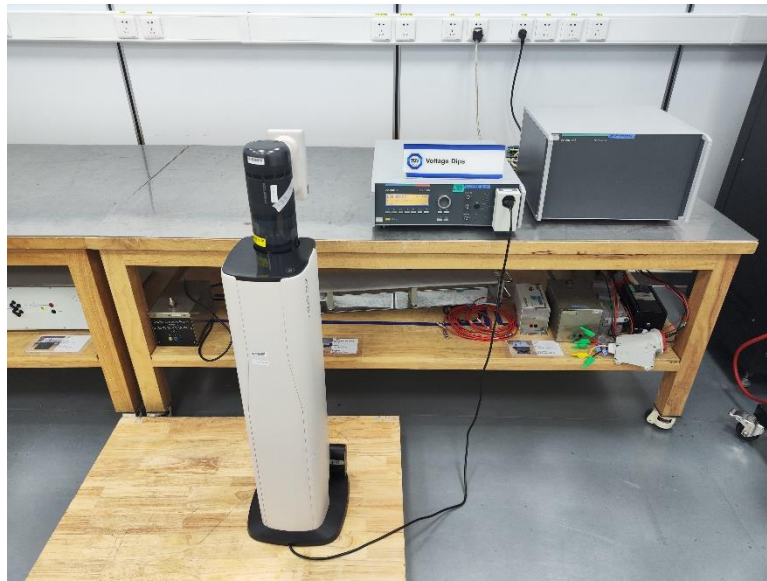
2.11.7 Test Results

Results for Configuration and Mode: Configuration 1 & operation 1

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Voltage Dip and Short Interruption					
Line under test	Vnom	Operating Frequency	Test Level	Duration	Result
Power line	230 Vac	50 Hz	0% of Vnom	½ cycle	Pass PC A
Power line	230 Vac	50 Hz	40% of Vnom	10 cycles (50Hz)	Pass PC A
Power line	230 Vac	50 Hz	70% of Vnom	25 cycles (50Hz)	Pass PC A



Test Setup

2.11.8 Test Location

This test was carried out in Room 120, SR-C.

3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Date	Calibration Due
Conducted Emission					
EMI Test Receiver	Rohde & Schwarz	ESW8	487/631911	2025.03.13	2026.03.12
LISN	Schwarzbeck	NSLK8127	487/601428	2024.09.02	2025.09.01
EMI Test Receiver	Rohde & Schwarz	ESR3	487/632314	2025.03.13	2026.03.12
LISN	Rohde & Schwarz	ENV216	487/602330	2025.03.31	2026.03.30
Disturbance Power					
EMI Test Receiver	Rohde & Schwarz	ESW8	487/631911	2025.03.13	2026.03.12
Clamp	Schwarzbeck	MDS21	487/601425	2024.11.23	2025.11.22
Radiated Emission					
EMI Test Receiver	Rohde & Schwarz	ESR7	487/632316	2025.03.13	2026.03.12
Antenna	Schwarzbeck	VULB 9168	487/622345	2025.03.14	2026.03.13
Semi-anechoic Chamber	Beijing Yice	3m SAC	487/772307	2024.06.30	2027.06.29
Harmonic and Flicker					
AC Power Supply Testing System	California Instruments	MX45-3PI	487/681243	2024.09.02	2025.09.01
Immunity					
ESD Simulator	HAEFELY	ONYX 30	487/751520	2025.03.31	2026.03.30
Signal Generator	Rohde & Schwarz	SMB-100B	487/392352	2025.03.13	2026.03.12
Power Amplifier	TESEQ	BBA-D11PE100	487/402322	2025.03.13	2026.03.12
Power Amplifier	TESEQ	BBA-A2500	487/402323	2025.03.13	2026.03.12
Power Meter	Rohde & Schwarz	NRX	487/742389	2025.03.13	2026.03.12
Power sensor	Rohde & Schwarz	NRP6A	487/742390	2025.03.13	2026.03.12
Power sensor	Rohde & Schwarz	NRP6A	487/742391	2025.03.13	2026.03.12
Antenna	AR	ATL80M6G	487/622350	2025.03.13	2026.03.12

EFT/BURST Generator	EM TEST	UCS 500N5E	487/751219	2025.03.31	2026.03.30
SURGE Generator	EM TEST	UCS 500N5V	487/751218	2025.03.31	2026.03.30
RF-Generator	EM test	NSC-4070C-80	487/752227	2025.03.31	2026.03.30
Coupling/decoupling Network	TeseQ	CDN M0216S	487/571842	2024.09.02	2025.09.01
Voltage Drop Generator	EM test	UCS500N5-PFS	487/751117	2024.11.23	2025.11.22

EMC Testing software

software	version	Testing items
EMC32	10.6	Conducted Emission; Disturbance Power; Radiated Emission; Radiated, radio-frequency, electromagnetic field immunity test
ICD CONTROL	7.1.2	Immunity to conducted disturbances, induced by radio-frequency fields

4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.07dB
Disturbance Power	30MHz to 300MHz, Clamp, 2.43dB
Radiated Disturbance	30MHz to 1GHz, Horizontal:4.12dB, Vertical: 4.30dB
Harmonic current emission	The test was applied using proprietary equipment that meets the requirements of EN 61000-3-2.
Flicker	The test was applied using proprietary equipment that meets the requirements of EN 61000-3-3.
Electrostatic discharge immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-2.
Radiated, radio-frequency, electromagnetic field immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-3.
Electrical fast transient /burst immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-4.
Immunity to conducted disturbances, induced by radio-frequency fields	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-6.
Surge immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-5.
Voltage dips, short interruptions and voltage variations immunity tests	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-11.

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.

5 Photographs

Photo documentation

Details of:	Overview for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Overview for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	



Details of:	Overview for H9A2A
View: ☐ General ☒ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Overview for H9A2A
View: ☐ General ☐ Front ☒ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of: Overview for H9A2A	
View: ☐ General ☐ Front ☐ Rear ☐ Right ☒ Left ☐ Top ☐ Bottom	 A photograph showing the left side of a white and black handheld device, model H9A2A. The device is lying on a blue textured surface. A black L-shaped ruler is placed next to it for scale. The device has a black cylindrical front section and a white handle. The left view shows the side of the black section and the handle.

Details of: Overview for H9A2A	
View: ☐ General ☐ Front ☐ Rear ☒ Right ☐ Left ☐ Top ☐ Bottom	 A photograph showing the right side of the same handheld device, model H9A2A. It is lying on the same blue textured surface with the same black L-shaped ruler for scale. The right view shows the side of the black cylindrical front section and the handle.

Details of:	Overview for H9A2A
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☒ Top ☐ Bottom	

Details of:	Overview for H9A2A
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☒ Bottom	

Details of:	Auto-Empty Dock for H9A2A
View: ☐ General ☒ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Auto-Empty Dock for H9A2A
View: ☐ General ☐ Front ☒ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

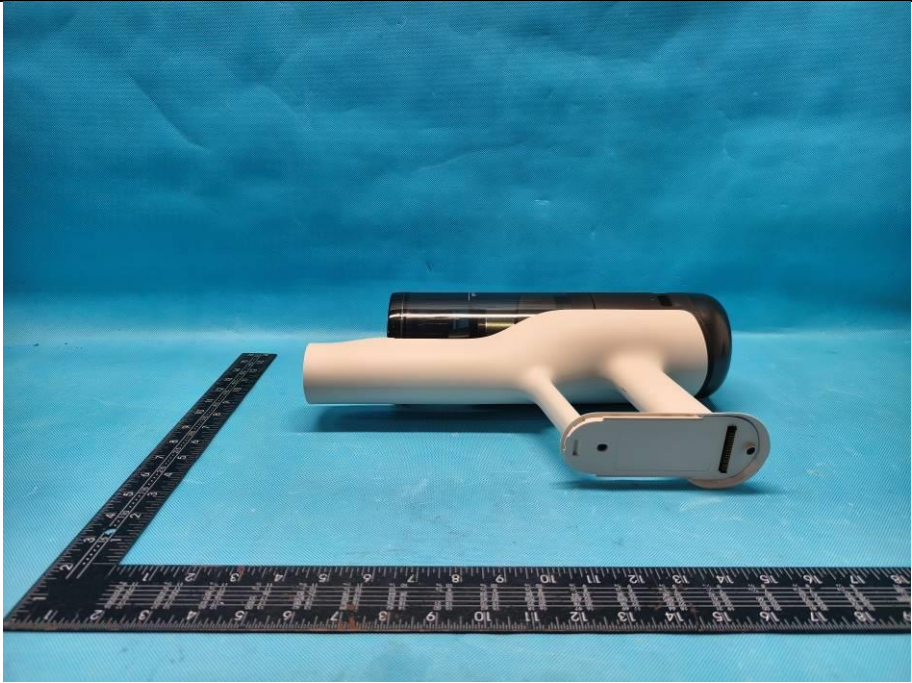


Details of:	Auto-Empty Dock for H9A2A
View: ☐ General ☐ Front ☐ Rear ☐ Right ☒ Left ☐ Top ☐ Bottom	

Details of:	Auto-Empty Dock for H9A2A
View: ☐ General ☐ Front ☐ Rear ☒ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Auto-Empty Dock for H9A2A	
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☒ Top ☐ Bottom		

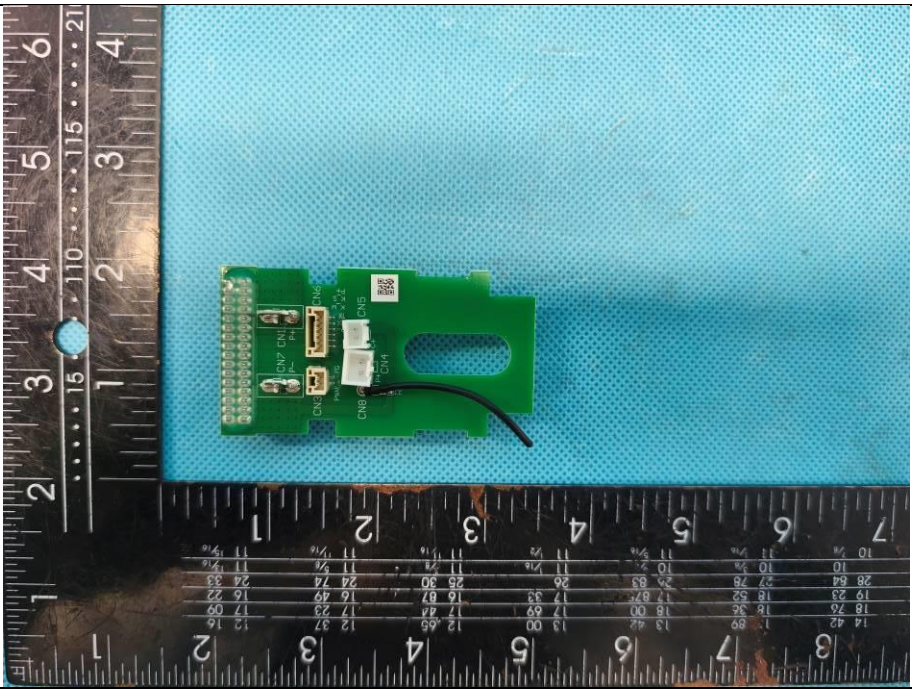
Details of:	Auto-Empty Dock for H9A2A	
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☒ Bottom		

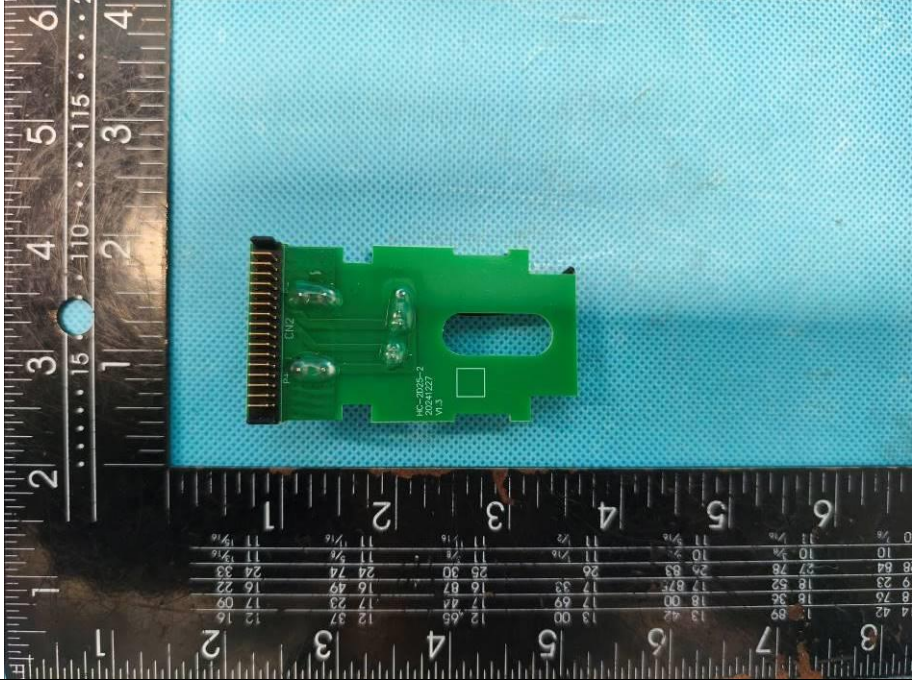
Details of:	Battery pack removed for H9A2A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Dust cup removed for H9A2A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

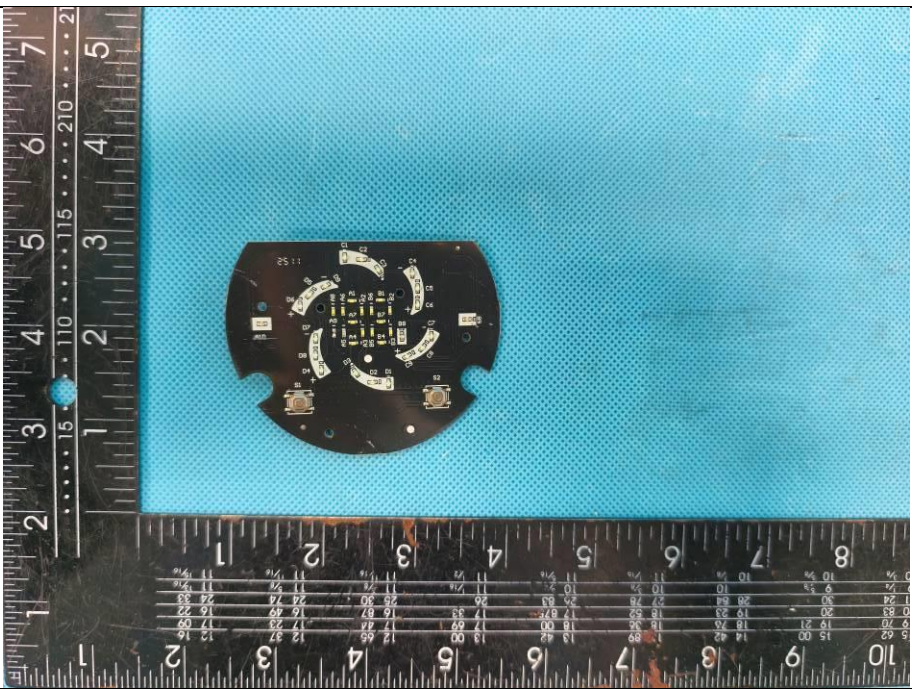
Details of:	Battery pack connector for H9A2A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

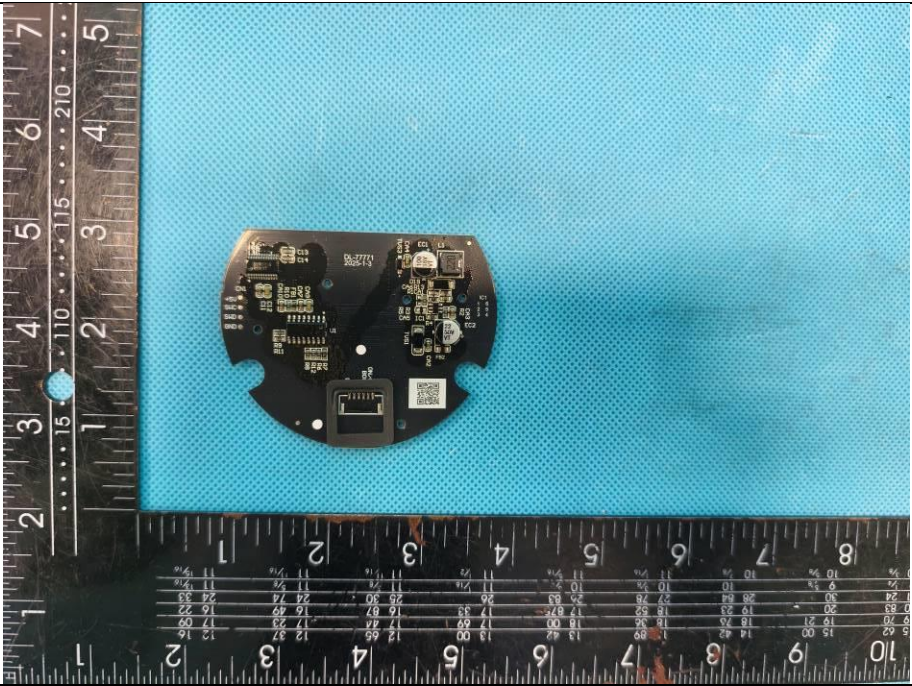
Details of:	Internal view for H9A2A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Charging PCB
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

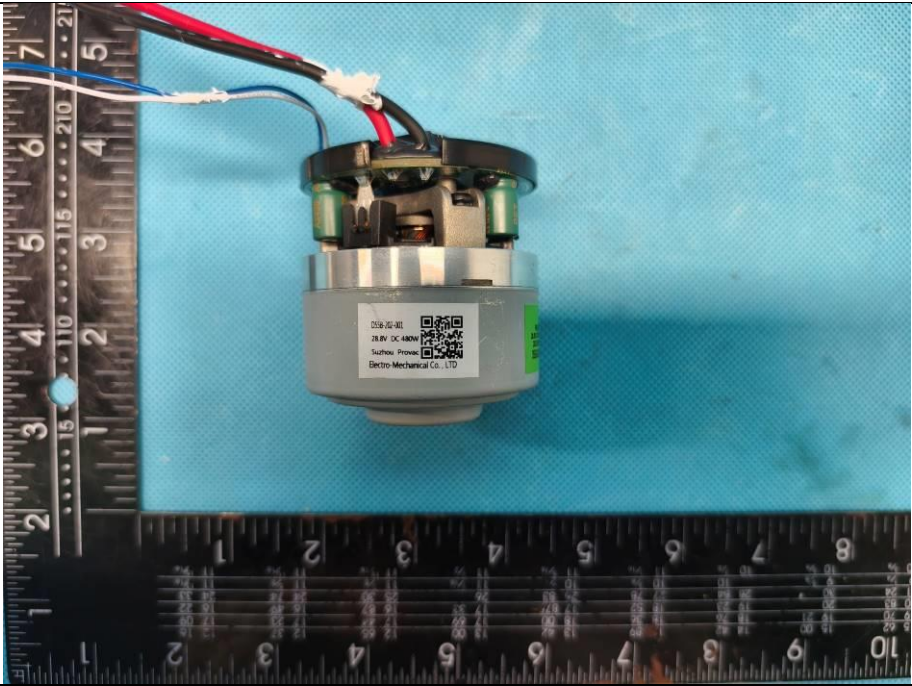
Details of:	Charging PCB
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

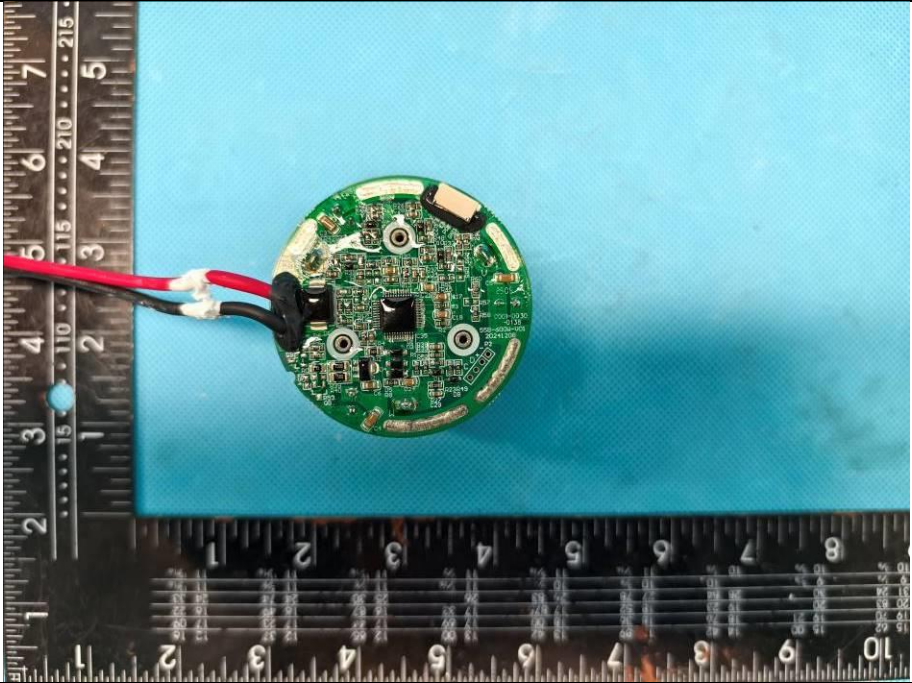
Details of:	Screen component
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Display PCB
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

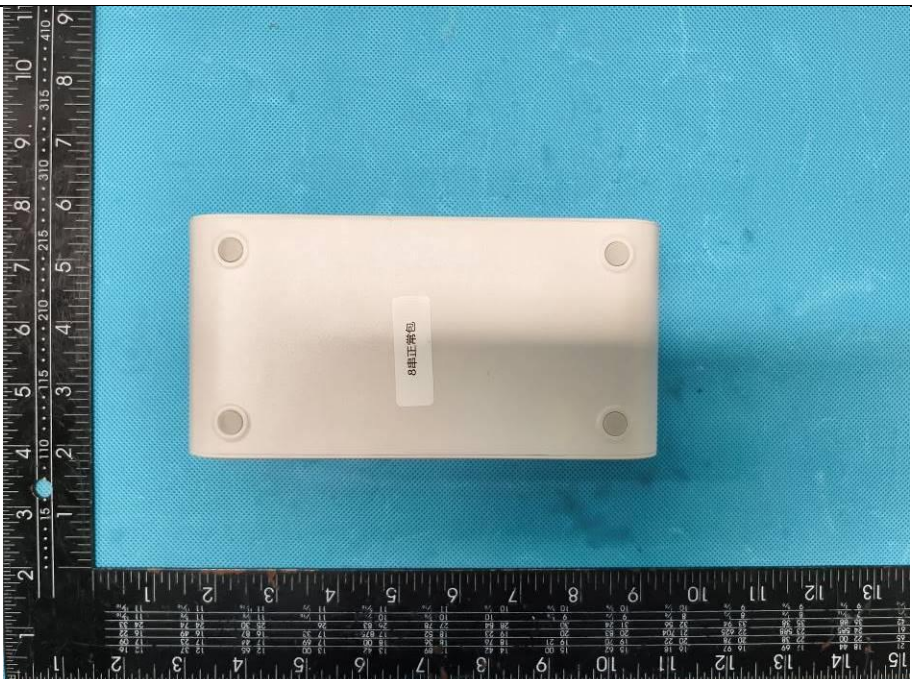
Details of:	Display PCB
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Motor cover for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

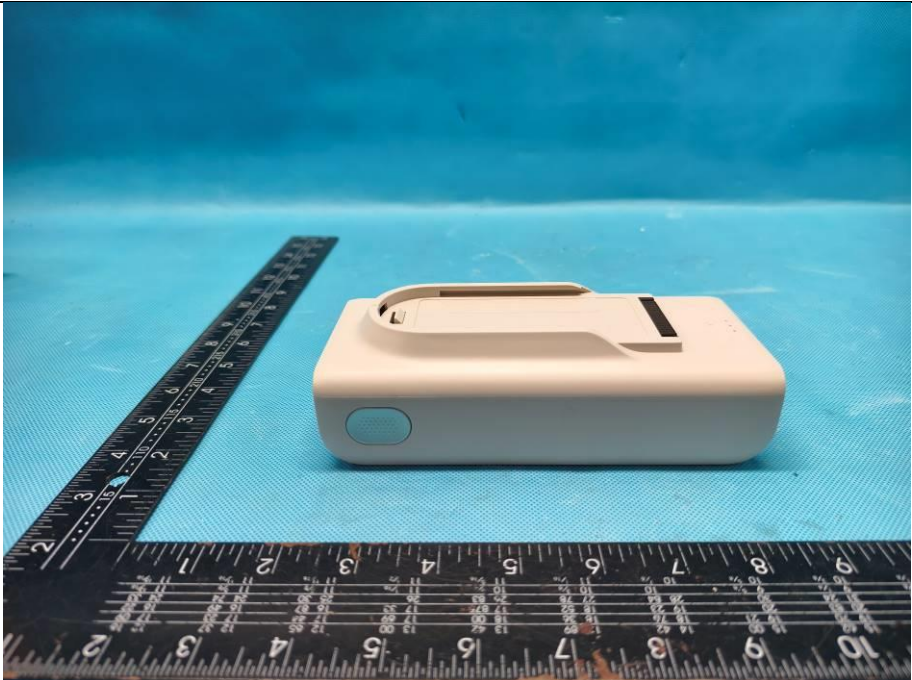
Details of:	Main motor for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

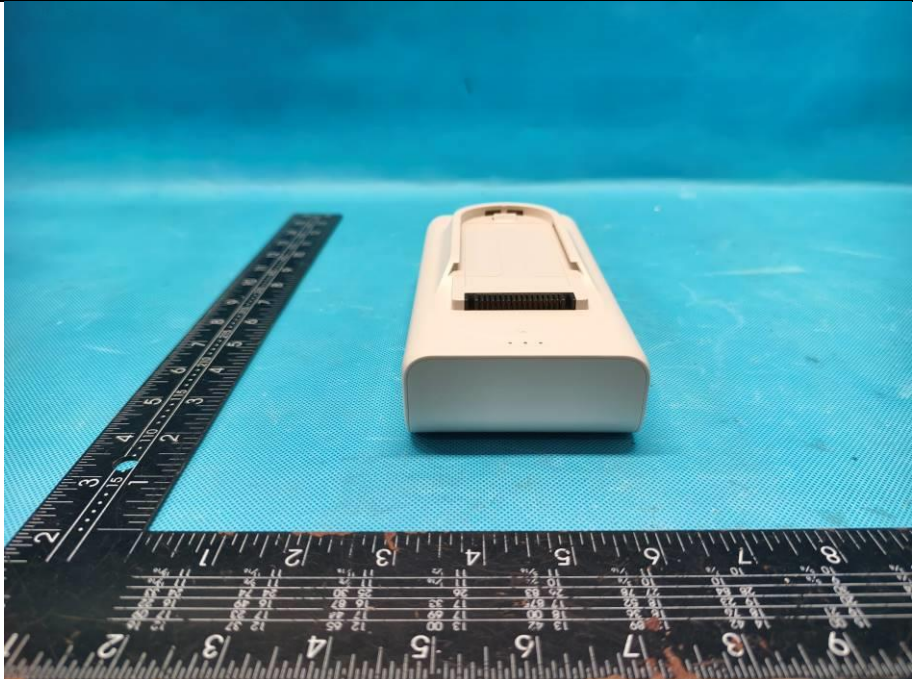
Details of:	Main motor for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

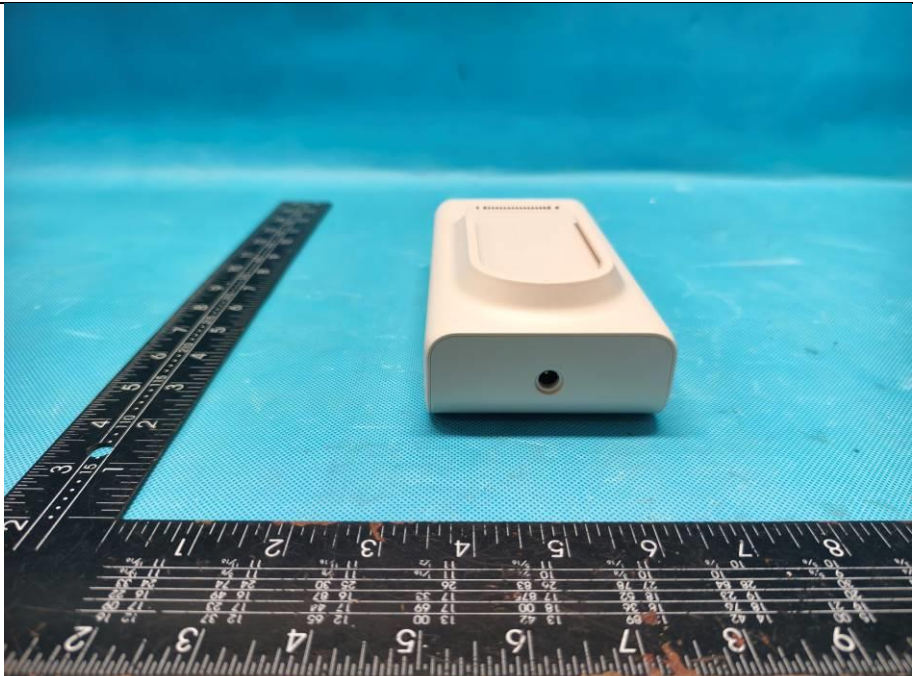
Details of:	Battery pack for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Battery pack for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Battery pack for H9A2A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Battery pack for H9A2A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Battery pack for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

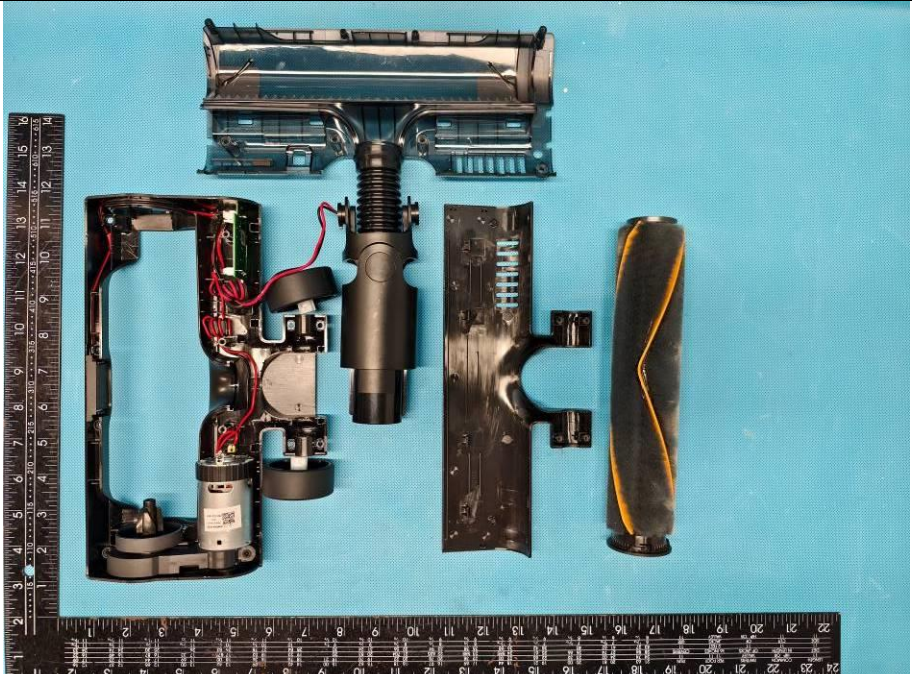
Details of:	Battery pack for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

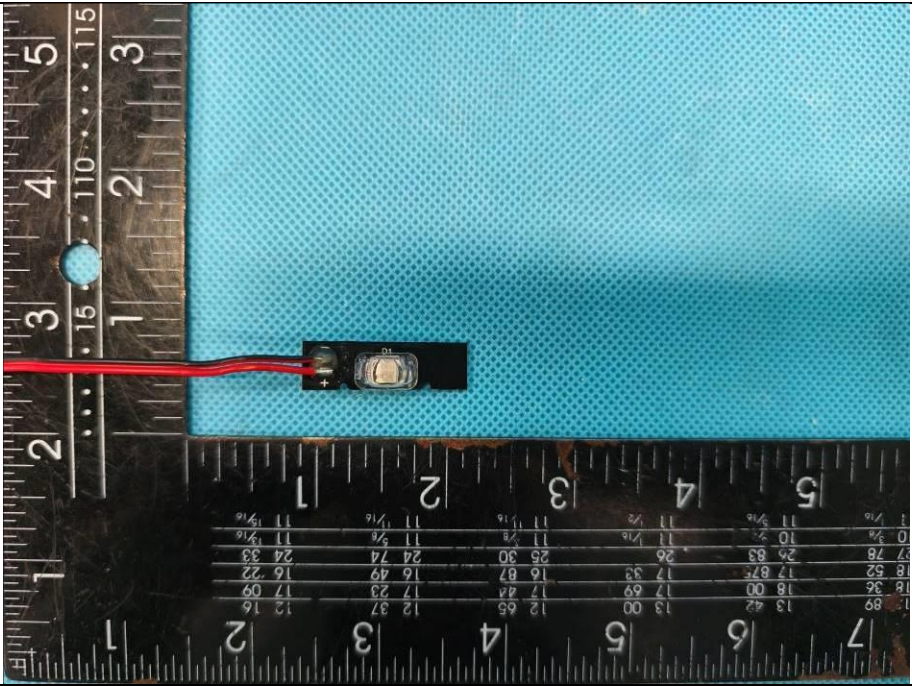


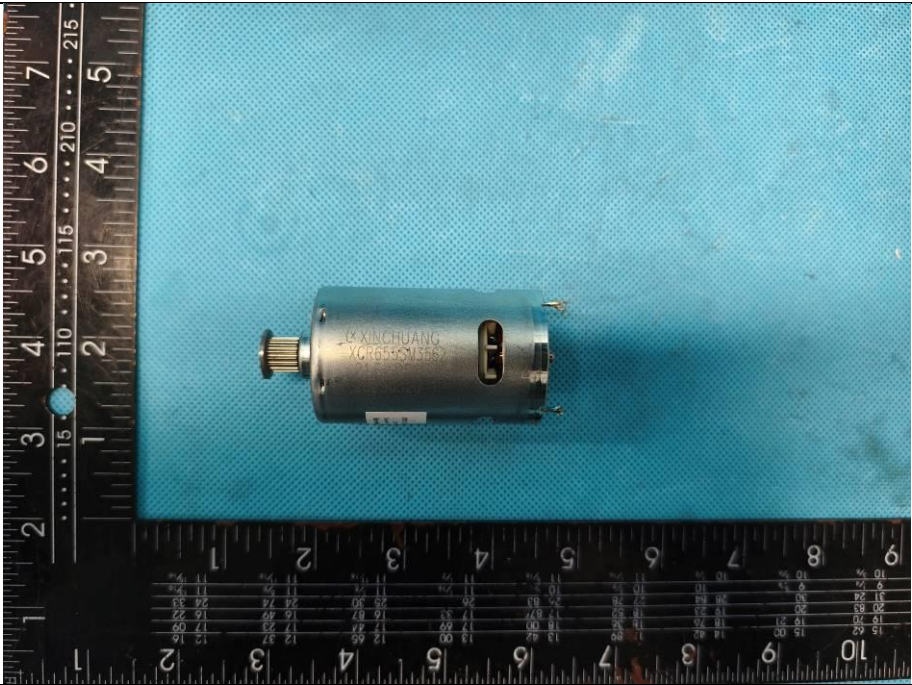
Details of:	Multi-Surface Brush for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

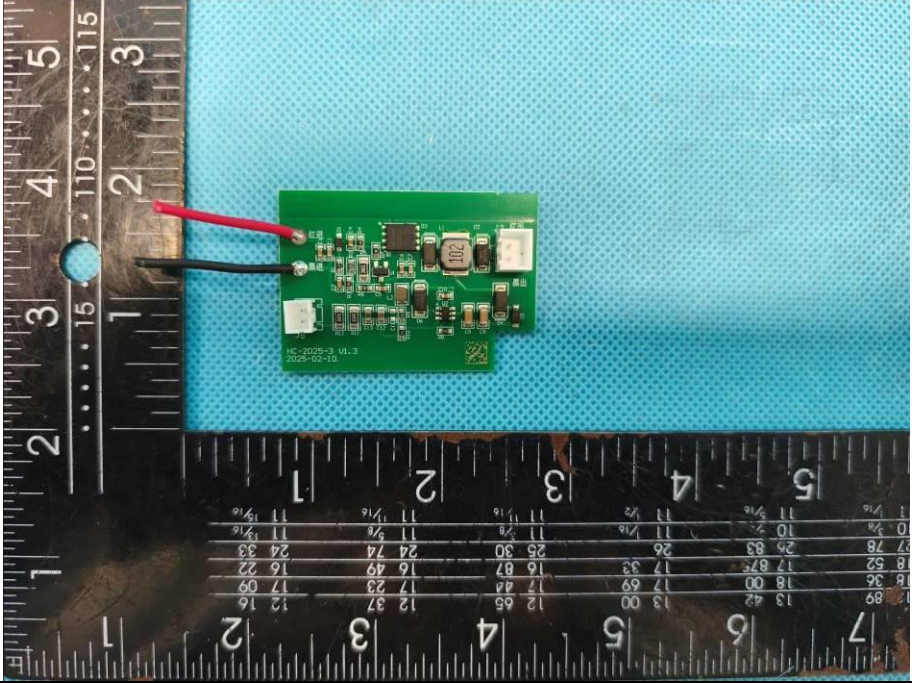
Details of:	Multi-Surface Brush for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

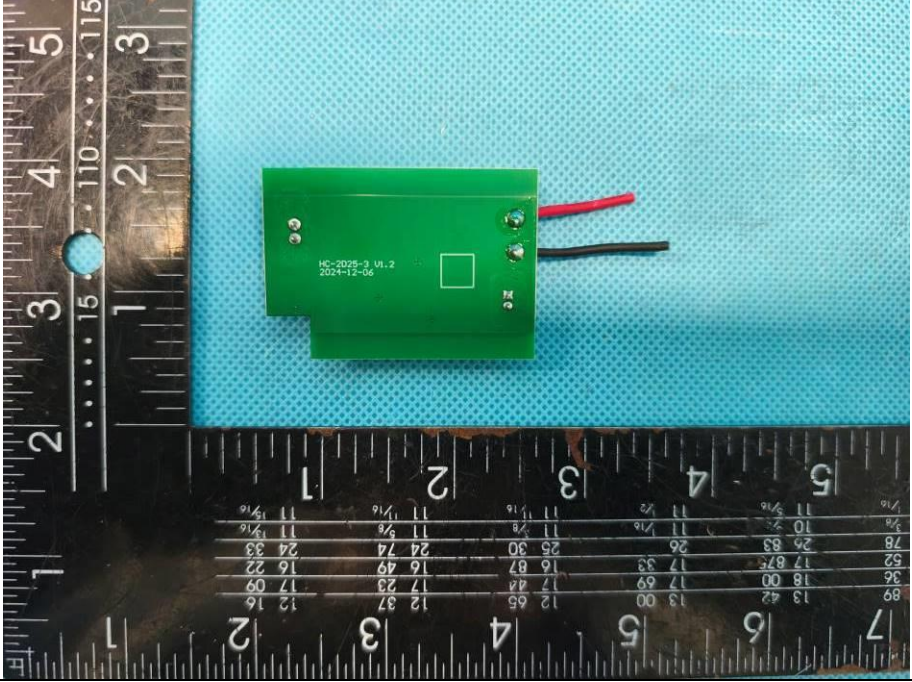
Details of:	Multi-Surface Brush for H9A2A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

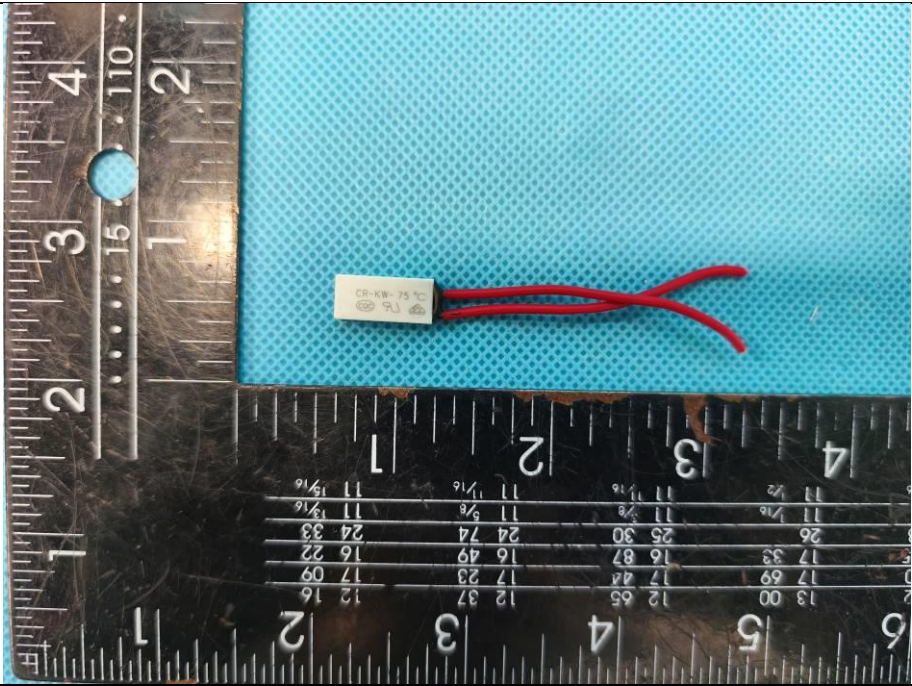
Details of:	Internal view of Multi-Surface Brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Light PCB of Multi-Surface Brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

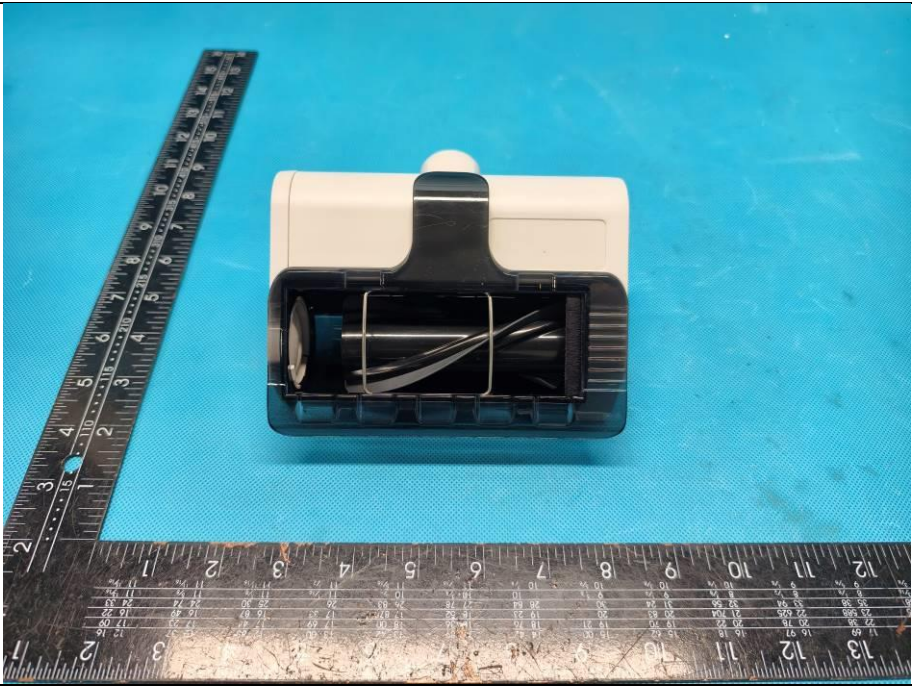
Details of:	Motor of Multi-Surface Brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	PCB of Multi-Surface Brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	PCB of Multi-Surface Brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Thermal protector of Multi-Surface Brush motor
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

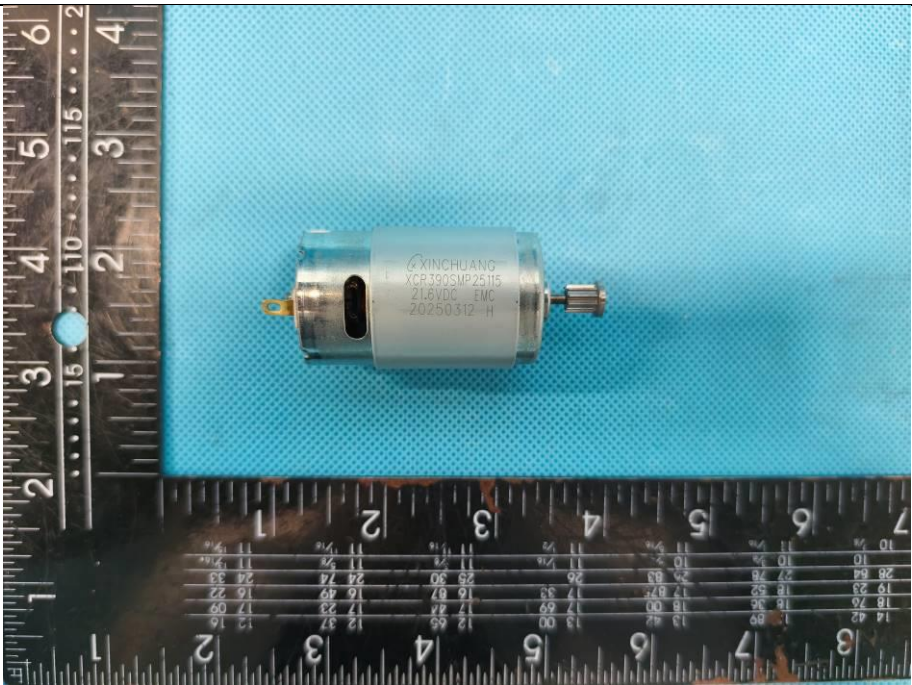
Details of:	Motorized Mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

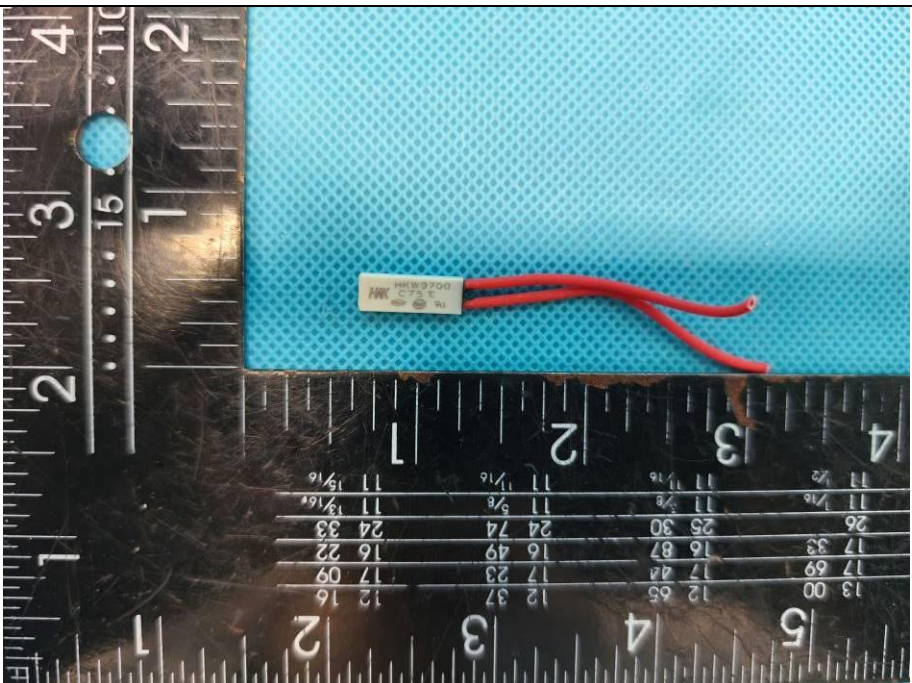
Details of:	Motorized Mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Motorized Mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Motorized Mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Motorized Mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Motor of Motorized Mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Thermal protector for motorized mini-brush
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	



Details of:	Overview for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Overview for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

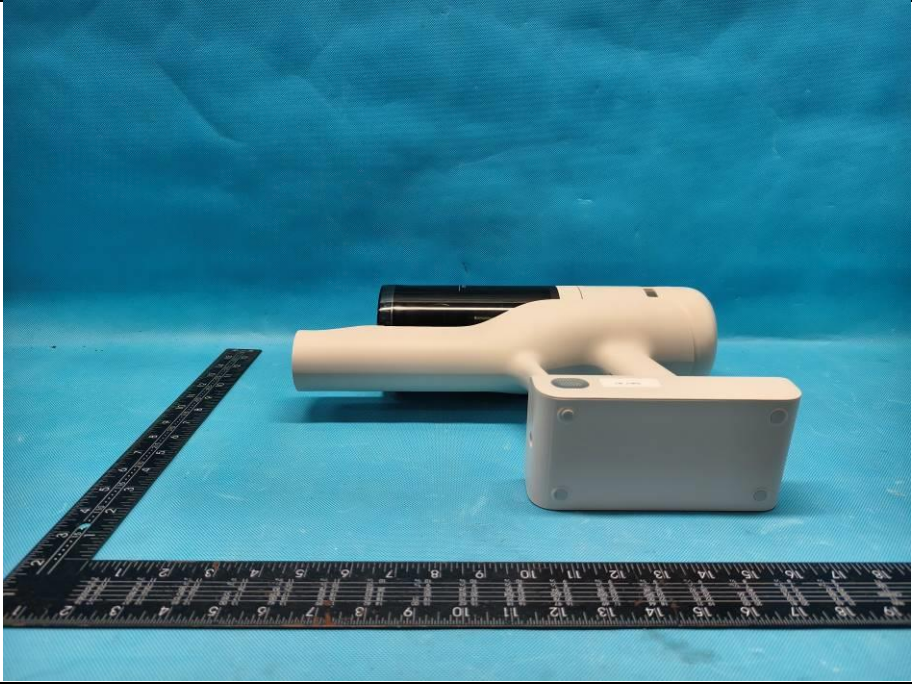
Details of:	Overview for H9A3A
View: ☐ General ☒ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

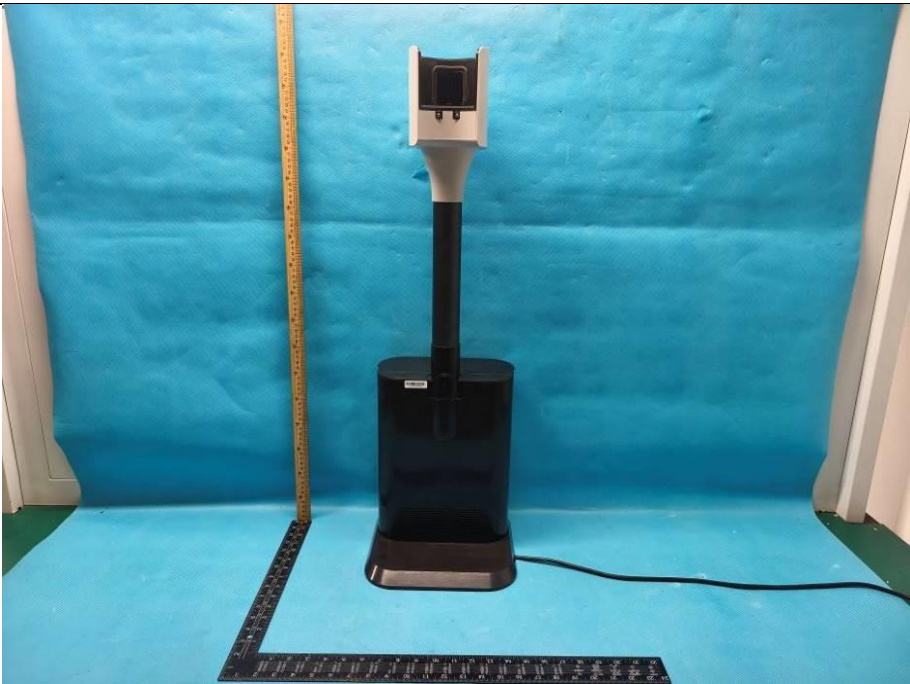
Details of:	Overview for H9A3A
View: ☐ General ☐ Front ☒ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

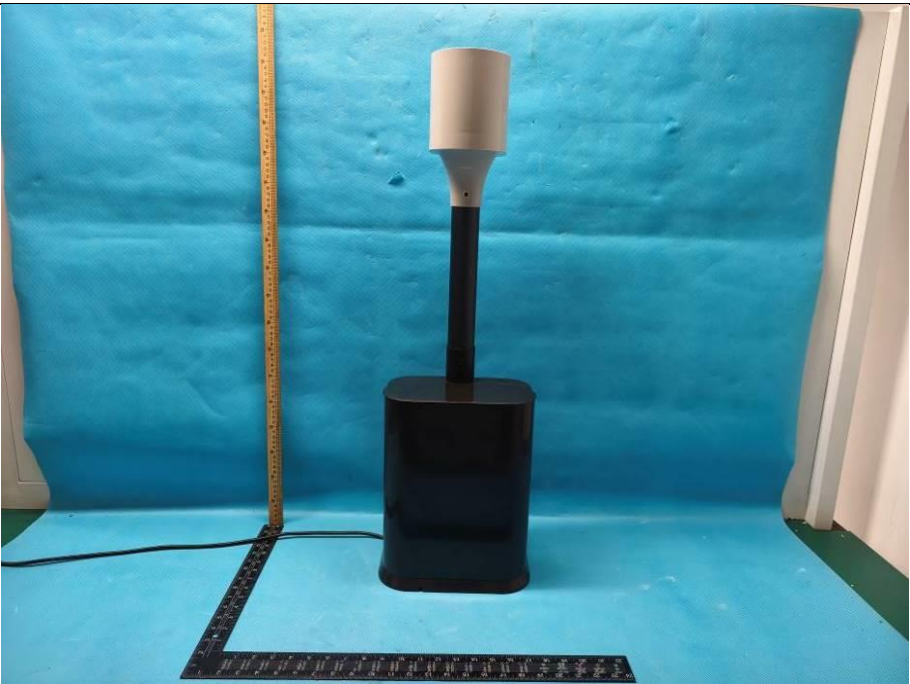
Details of: Overview for H9A3A	
View: ☐ General ☐ Front ☐ Rear ☐ Right ☒ Left ☐ Top ☐ Bottom	 A photograph showing the left side of a white handheld device with a black lens. The device is lying on a blue surface next to a black L-shaped ruler for scale. The ruler shows measurements in centimeters and inches.

Details of: Overview for H9A3A	
View: ☐ General ☐ Front ☐ Rear ☒ Right ☐ Left ☐ Top ☐ Bottom	 A photograph showing the right side of the same white handheld device. It is lying on a blue surface next to a black L-shaped ruler for scale. The ruler shows measurements in centimeters and inches.

Details of:	Overview for H9A3A
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☒ Top ☐ Bottom	

Details of:	Overview for H9A3A
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☒ Bottom	

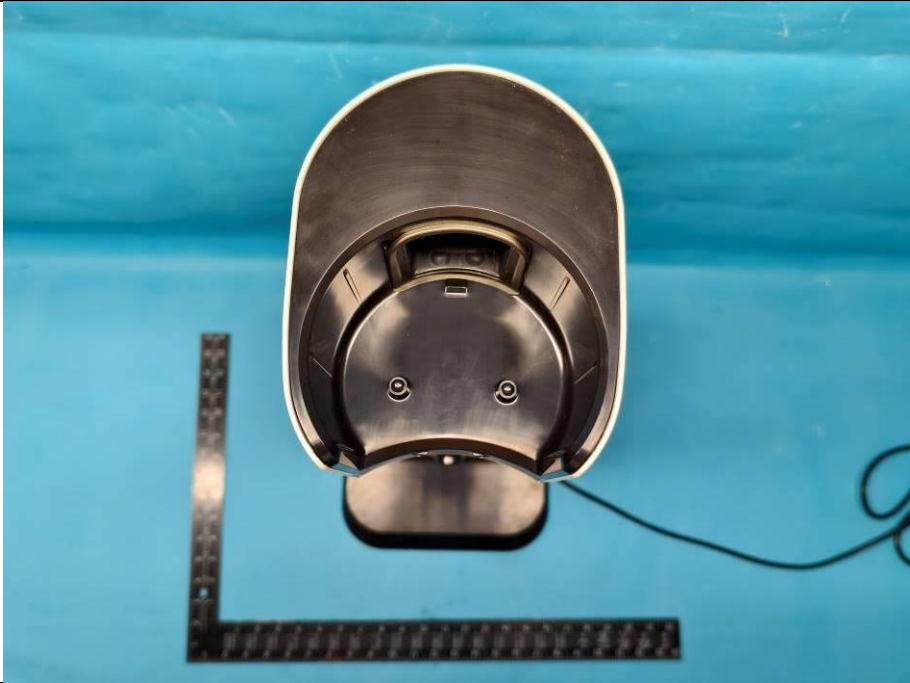
Details of:	Auto-Empty Dock for H9A3A
View: ☐ General ☒ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

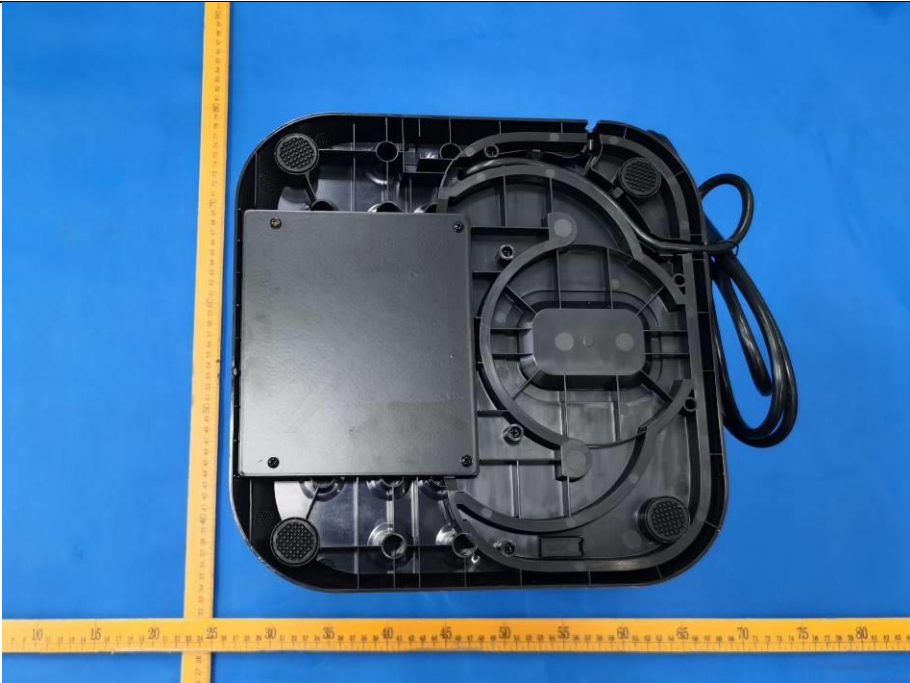
Details of:	Auto-Empty Dock for H9A3A
View: ☐ General ☐ Front ☒ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

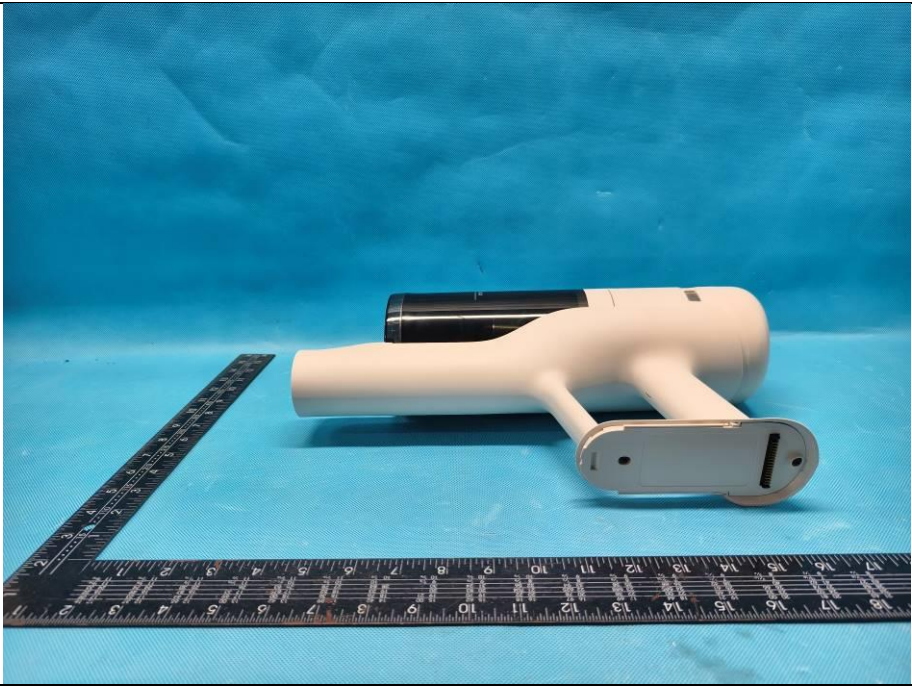


Details of:	Auto-Empty Dock for H9A3A
View: ☐ General ☐ Front ☐ Rear ☐ Right ☒ Left ☐ Top ☐ Bottom	

Details of:	Auto-Empty Dock for H9A3A
View: ☐ General ☐ Front ☐ Rear ☒ Right ☐ Left ☐ Top ☐ Bottom	

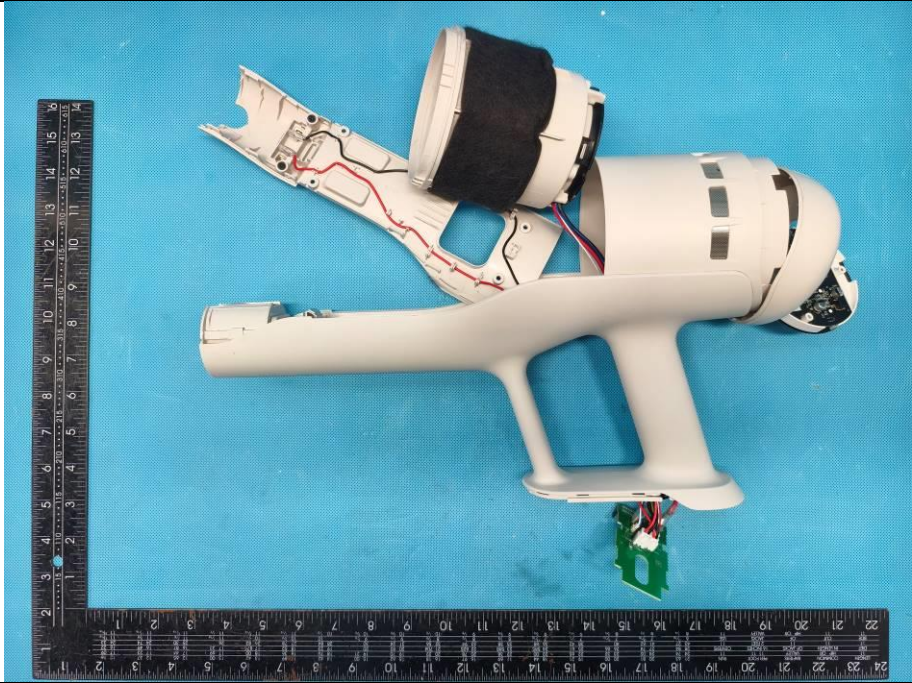
Details of:	Auto-Empty Dock for H9A3A	
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☒ Top ☐ Bottom		

Details of:	Auto-Empty Dock for H9A3A	
View: ☐ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☒ Bottom		

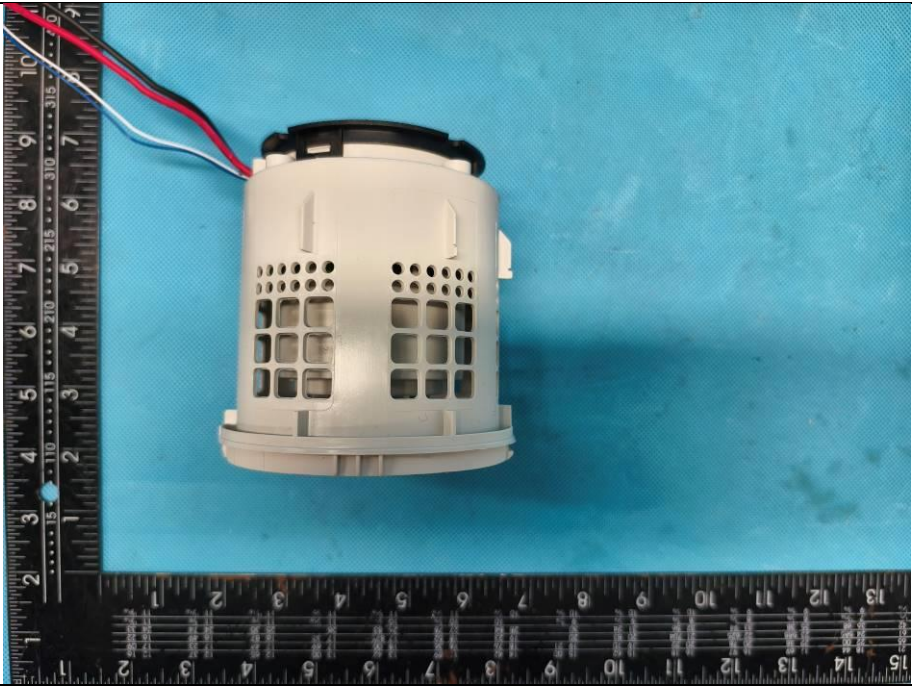
Details of:	Battery pack removed for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

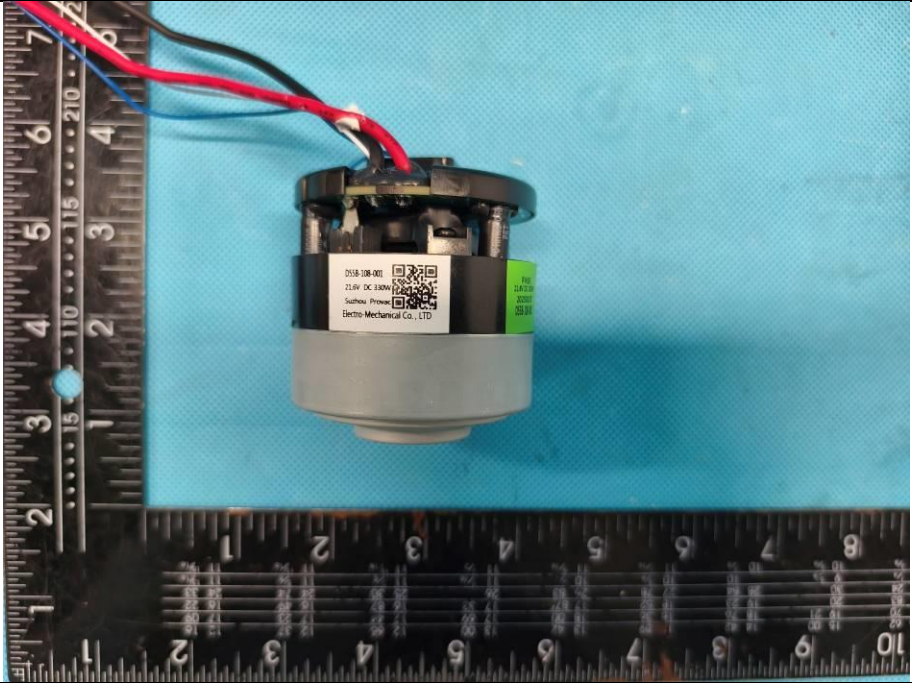
Details of:	Dust cup removed for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

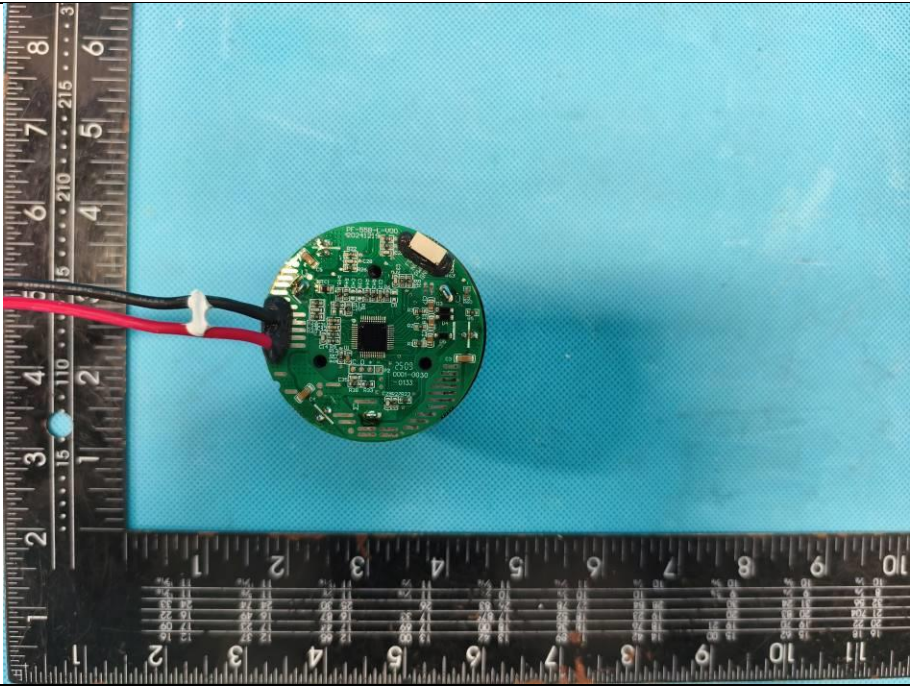
Details of:	Battery pack connector for H9A3A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Internal view for H9A3A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		



Details of:	Motor cover for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	 A photograph of a white, cylindrical motor cover with a black top and bottom flange. The side of the cover features a grid of ventilation holes. Three wires (red, black, and blue) are connected to the top. The component is placed on a blue surface next to a black ruler for scale.

Details of:	Main motor for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	 A photograph of a small, cylindrical DC motor with a black top and a white base. A label on the black part reads "DS18-108-002", "21.6V DC 3.0W", "Suzhou Phoenix", and "Electro-Mechanical Co., LTD". A green label on the white base reads "P/N 1162301" and "12000". Three wires (red, black, and blue) are connected to the top. The motor is placed on a blue surface next to a black ruler for scale.

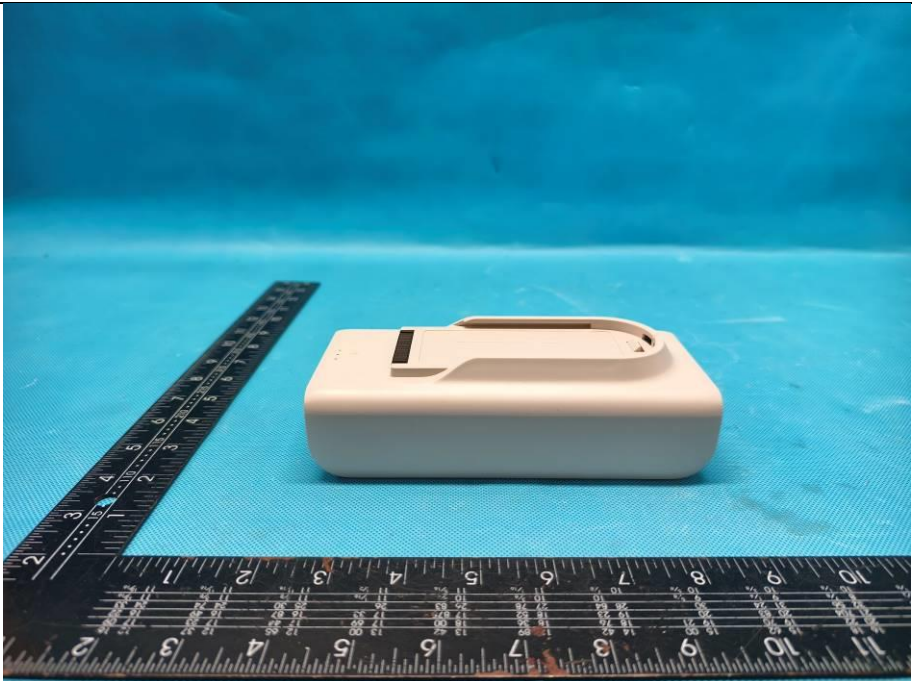
Details of:	Main motor for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

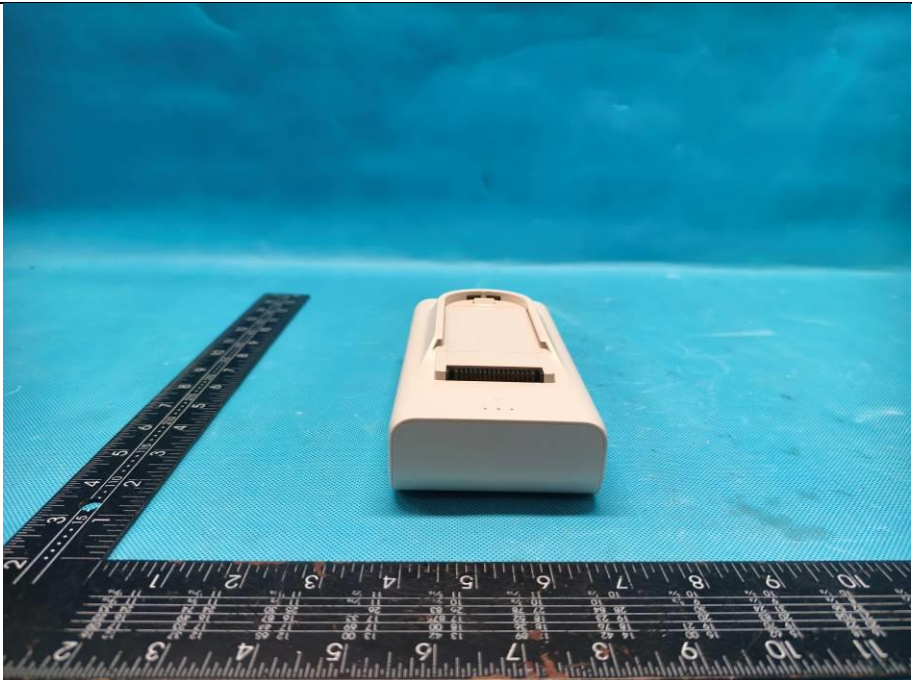
Details of:	Battery pack for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

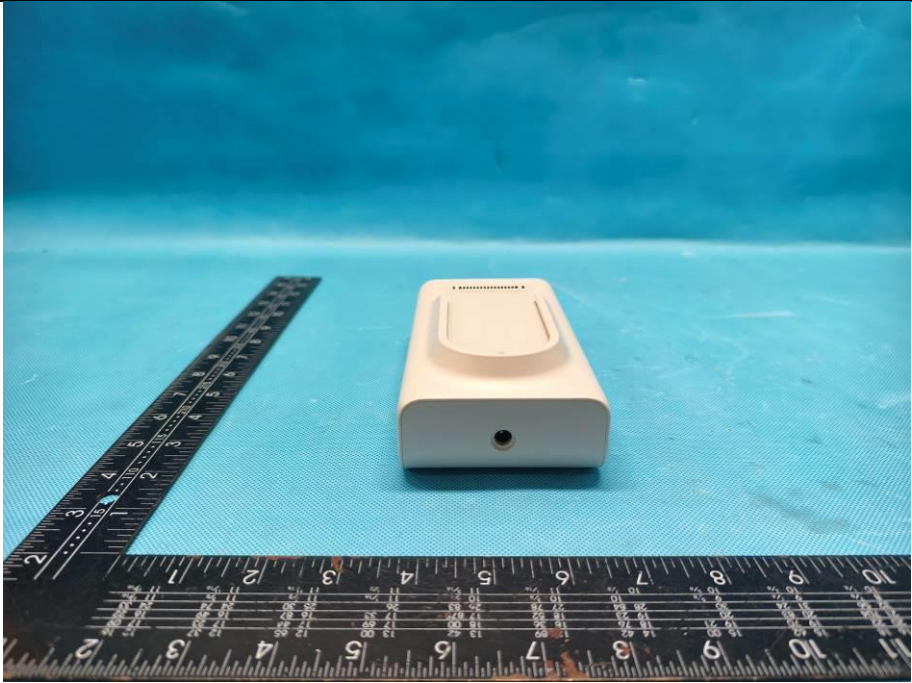


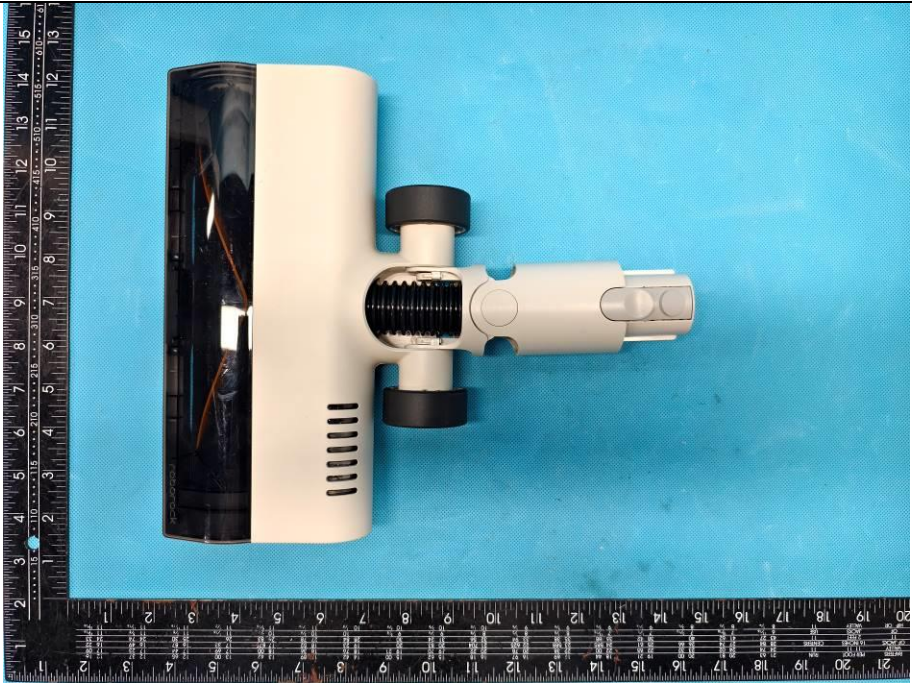
Details of:	Battery pack for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Battery pack for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Battery pack for H9A3A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Battery pack for H9A3A	
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom		

Details of:	Battery pack for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Multi-Surface Brush for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	



Details of:	Multi-Surface Brush for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	

Details of:	Multi-Surface Brush for H9A3A
View: ☒ General ☐ Front ☐ Rear ☐ Right ☐ Left ☐ Top ☐ Bottom	